



AW250192
Wall-mounted hood 200 series
Full glass front in Gaggenau anthracite
Width 90 cm
Air extraction / Air recirculation

A+

Angled vapour screen provides particularly generous free space above the cooktop

Filter cover with easy to clean glass front

Glass cover that matches 200 series ovens

Energy-saving, low-noise fan

Vapours can be caught efficiently thanks to two suction areas on the underside and front

The glass panel can be extended forward to increase the area for catching vapours during particularly intensive cooking

Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours

Dimmable ambient lighting allows light to be adjusted individually

Air extraction or air recirculation system
Chimney not included

Output

Odour reduction air recirculation 95%.

Features

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter and activated charcoal filter saturation indicator.

Interval ventilation, 6 min.

Cooktop-based ventilation control (with suitable cooktop).

Metal grease filter, dishwasher-safe.

Glass filter cover in Gaggenau anthracite.

2 activated charcoal filter fitted in appliance ex factory.

Neutral white LED light (3500 K), continuously dimmable.

Indirect LED light (3.000 K), dimmable.

Fan technology with highly efficient, brushless DC motor (BLDC).

Integrated sound insulation for quiet operation.

Easy to clean inner frame.

Easy mounting system for simple installation and alignment.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Consumption data

Energy consumption 36.7 kWh/year.

Air extraction (min/max) according to EN 61591: 282 / 990 m³/h.

Noise (min/max): 43 / 70 dB (A) re 1 pW.

Air recirculation (min/max) according to EN 61591:

515 / 931 m³/h.

68 / 79 dB (A) re 1 pW.

Planning notes

The ventilation appliance is supplied for air recirculation mode only without a chimney. The special accessory AD 200 012 is available for potential air extraction mode.

Characteristics

Product name/family

Color chimney

Typology

Wall-mounted

Approval certificates

CE, E17D UKCA marking, Eurasian, G-Mark, Ukraine, VDE

Length electrical supply cord

130

Required niche size for installation

(HxWxD)

Height of the chimney

Height of product, without chimney

452

Minimum distance above an electric hob

450

Minimum distance above a gas hob

650

Net weight

23.988

Type of control

Electronic

Number of speed settings

Maximum output air extraction

529

Boost position output recirculating

931.0

Maximum output recirculating air

515

Boost position air extraction

990

Number of lights

2

Noise level

57

Diameter of air outlet

150

Grease filter material

Washable aluminium

EAN code

4242006264505

Connection Rating

270

Fuse protection

10

Voltage

220-240

Frequency

60; 50

Plug type

Gardy plug w/ earthing

Installation typology

Wall-mounted

Consumption and connection features

2021-10-14

Page 1

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 45 cm.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 270 W.

Connecting cable 1.3 m with plug.

Power consumption standby/display off 0.5 W.

Please check the user manual for how to switch off the WiFi module.

Color Variants

AW250192

Full glass front in Gaggenau anthracite


Width 90 cm

GAGGENAU


AW250192
 Wall-mounted hood 200 series
 Full glass front in Gaggenau anthracite
 Width 90 cm
 Air extraction / Air recirculation

2021-10-14
 Page 2

Side view




Air extraction

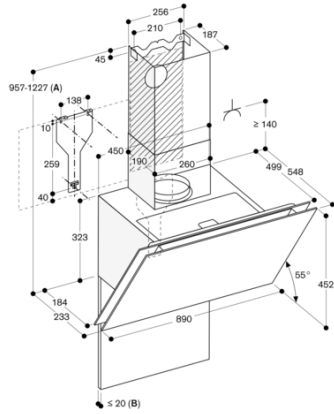

A: Air extraction
 B: Note the maximum thickness of the back panel.
 A: Socket
 measurements in mm

Air recirculation

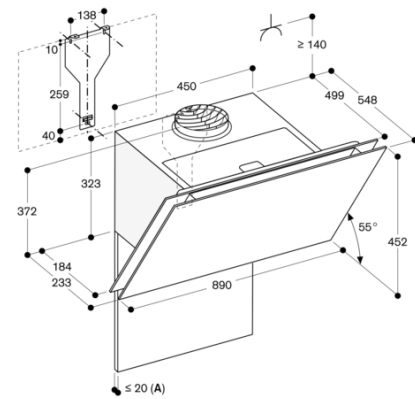

A: Note the maximum thickness of the back panel.
 A: Socket
 measurements in mm