


N 90, Built-in oven with steam function, Width 60 cm
B47FS36NOB



Built-in oven with FullSteam and SLIDE&HIDE® - combining all heating types and steam cooking in a single oven with unrestricted access.

- ✓ Slide&Hide® - the door disappears underneath the oven for unrestricted access and the handle rotates for easy handling
- ✓ ShiftControl - fast navigation through menus and simple operation with the TFT display.
- ✓ Baking and Roasting Assistant with Automatic Programmes - the duo for optimal baking at your command
- ✓ LED Lights - bright illumination exactly where you need it
- ✓ FullSteam Oven: A full function oven and steamer in one. Use FullSteam to create healthy, succulent dishes with intense flavour.

Features

Technical Data

Color / Material Front : Stainless steel

Built-in / Free-standing : Built-in

Door opening : Drop down

Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550

Dimensions : 595 x 596 x 548

Dimensions of the packed product (HxWxD) (mm) : 675 x 660 x 690

Control Panel Material : Stainless steel

Door Material : Glass

Net weight (kg) : 41.593

Approval certificates : CE, VDE

Length electrical supply cord (cm) : 120

EAN code : 4242004181620

Current (A) : 16

Voltage (V) : 220-240

Frequency (Hz) : 60; 50

Plug type : no plug

Approval certificates : CE, VDE

Number of cavities (2010/30/EC) : 1

Usable volume (of cavity) - NEW (2010/30/EC) : 71

Energy efficiency rating : A+

Energy consumption per cycle conventional (2010/30/EC) : 0.87

Energy consumption per cycle forced air convection (2010/30/EC) : 0.69

Energy efficiency index (2010/30/EC) : 81.2

Optional accessories

Z11SZ00X0	SeamlessCombination mounting kit
Z11SZ80X0	SeamlessCombination 60 + 29cm
Z11SZ90X0	SeamlessCombination 60 + 45cm
Z12CB10A0	Baking tray, anthracite enamelled
Z12CM10A0	Moussaka pan, anthracite enamelled
Z12CU10A0	Multipurpose pan, anthracite enamelled
Z13TC10X0	
Z13TF36X0	
Z1913X0	Baking Stone



N 90, Built-in oven with steam function, Width 60

cm

B47FS36NOB

Features

Heating Functions

- Combi-steam oven with 12 heating methods: CircoTherm® Eco Bread Baking Full surface grill Hot Air Centre area grill Top/bottom heating Top/bottom heating Eco CircoTherm® Intensive Low temperature cooking Bottom heating Circo-roasting Keep warm
- Additional heating methods with steam: FullSteam, Reheating, Dough Proving, Defrost setting
- Temperature range 40 °C - 250 °C
- Cavity volume: 71 net usable litres

Design

- Anthracite enamel cavity with 4 shelf positions

Cleaning

- EcoClean Direct : ceiling, back panel, side liners
- EcoClean program, EasyClean program

Convenience

- 4.1" TFT colour and graphics display with ShiftControl
- Additional functions: Descaling program drying function
- Slide&Hide® door, SoftOpen
- Bake and Roast assist, Automatic programs
- Number of automatic programmes: 30 PC
- MultiPoint MeatProbe
- Electronic clock with start / stop function
- Rapid heating-up: automatic
- LED lighting
- Large 1 litre water tank
- Water tank empty indicator
- Location of the steam generator is outside of the cavity
- Cooling fan
- Stainless-steel fan

Hook-in racks / rails

Accessories

- 1 x universal pan, 2 x grid, 1 x steam container, punched, size XL, 1 x steam container, punched, size S, 1 x steam container, unpunched, size S

Safety and Environment


- Individual adjustable child lock Safety switch off Residual heat indicator Start button Door contact switch

Technical Info

- Length of mains cable: 120 cm
- Total connected load electric: 3.45 KW
- Appliance dimensions (HxWxD): 595 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

N 90, Built-in oven with steam function, Width 60 cm
 B47FS36NOB

Dimensioned drawings

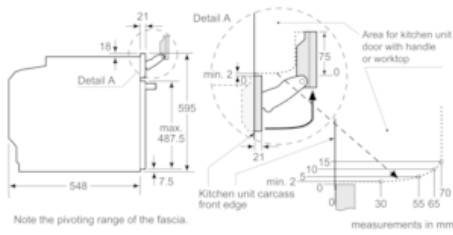

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

