


N 90, Built-in oven with added steam function, Stainless steel
B58VT68H0B



COOKING PASSION SINCE 1877



A

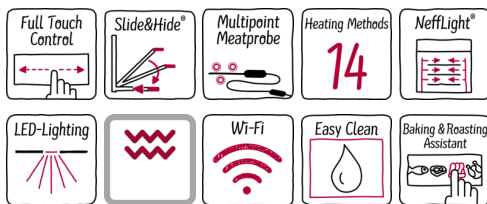

Built-in oven with VarioSteam® and SLIDE&HIDE® - fuller flavour and unrestricted access to the oven interior.

- ✓ Slide&Hide® - the fully retracting oven door.
- ✓ VarioSteam® - Steam assistance for CircoTherm® ovens, that cooks foods moist on the inside and crisp on the outside.
- ✓ The Multi Point® meat probe helps the oven regulate the temperature and automatically adjust the cooking time.
- ✓ The duo for perfect cleaning: Pyrolysis after heavy use - the oven interior cleans itself.
- ✓ EasyClean® - the environment-saving option for fast oven cleaning.
- ✓ FullTouch Control - simple, precise oven control by fingertip touch on the smooth surface of the high resolution TFT colour display.
- ✓ NeffLight® - perfect illumination of all four oven levels, even with the door shut.
- ✓ ComfortFlex® - the telescoping rails come out far enough to let you grasp the baking sheet conveniently from the sides.

Features

Technical Data

Color / Material Front : Stainless steel
 Built-in / Free-standing : Built-in
 Integrated Cleaning system : Hydrolytic, Pyrolytic
 Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550
 Dimensions of the product (mm) : 595 x 596 x 548
 Dimensions of the packed product (HxWxD) (mm) : 670 x 690 x 660
 Control Panel Material : Stainless steel
 Door Material : Glass
 Net weight (kg) : 45.100
 Usable volume of cavity (l) : 71
 Cooking method : Bottom heat, Bread Baking Setting, Conventional heat, Defrost, Full width grill, Half width grill, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting, pre-heating, warming
 Oven control : electronic
 Number of interior lights : 3
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 120
 EAN code : 4242004236092
 Number of cavities (2010/30/EC) : 1
 Energy efficiency class (2010/30/EC) : A
 Energy consumption per cycle conventional (2010/30/EC) : 0.90
 Energy consumption per cycle forced air convection (2010/30/EC) : 0.74
 Energy efficiency index (2010/30/EC) : 87.1
 Connection Rating (W) : 3450
 Current (A) : 16
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : no plug

Optional accessories

Z11CR10X0 : Baking and roasting grid (standard) ,
 Z11SZ00X0 : SeamlessCombination mounting kit ,
 Z11SZ80X0 : SeamlessCombination 60 + 29cm , Z11SZ90X0 :
 SeamlessCombination 60 + 45cm , Z11TC10X0 : ComfortFlex
 Rail (1 level) , Z12CB10A0 : Baking tray, anthracite enamelled ,
 Z12CM10A0 : Moussaka pan, anthracite enamelled , Z12TF36X0 :
 3 level telescopic rails, full ext,pyro , Z13CV05S0 : Cover Strip ,
 Z18V60X0 : Cookbook , Z1913X0 : Baking Stone , Z19DD10X0 :
 Steam set for ovens



4 242004 236092

*N 90, Built-in oven with added steam function,
Stainless steel
B58VT68H0B*

Features

Heating Functions

- Oven with 14 heating methods:
 - Hot Air
 - CircoTherm® Eco
 - Top/bottom heating
 - Top/bottom heating Eco
 - Circo-roasting
 - Full surface grill
 - Centre area grill
 - CircoTherm® Intensive
 - Bread Baking
 - Bottom heating
 - Low temperature cooking
 - Defrost
 - Plate warming
 - Keep warm
- Additional heating methods with steam: Reheating, Dough Proving
- Temperature range 40 °C - 275 °C
- Cavity volume: 71 net usable litres

Design

- Touch control
- Anthracite enamel cavity with 4 shelf positions

Cleaning

- Pyrolytic self cleaning
- EasyClean® Cleaning aid programm
- Full glass inner door - safer touch door

Convenience

- 5.7" TFT colour and graphics Display with FullTouch control
- Temperature proposal
 - Optical temperature control
 - Actual temperature display
 - Sabbath setting
- Additional functions:
 - Descaling program
 - Steam cooking function (system steamer accessory required)
 - Drying function
- Slide&Hide® door, SoftOpen
- Bake and Roast assist, Automatic programs
- Number of automatic programmes: 14 PC
- MultiPoint MeatProbe
- Electronic clock
- Rapid heating-up
- NeffLight®, LED lighting
- Large 1 litre water tank
- Water tank empty indicator
- Location of the steam generator is outside of the cavity
- Cooling fan
- Stainless-steel fan
- Info button
- Revolution handle

Hook-in racks / rails

- Cavity with shelf support rails, Telescopic shelf rail, 1-level flexible, full extension, safety stop function

Accessories

- 1 x combination grid, 2 x universal pan

Safety and Environment

- Individual adjustable child lock
 - Safety switch off
 - Residual heat indicator
 - start button
 - door contact switch
- Quadruple glazed CoolTouch door

Technical Info

- Length of mains cable: 120 cm
- Total connected load electric: 3.45 KW
- Appliance dimensions (HxWxD): 595 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing