

DA 3496

Slimline rangehood

with energy-efficient LED lighting and light-touch switches for easy use.



- Elegant design – slim 895mm extractor canopy
- Powerful – 720m<sup>3</sup>/h on the booster setting
- Efficient filtration – 10-layer stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation

<b>Construction type</b>	
Slimline <H>rangehood</>	•
<b>Design</b>	
Colour	Stainless steel
<b>Operating modes</b>	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF13-1
<b>User convenience</b>	
Electronic controls	•
Light-touch controls	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
<b>Cleaning convenience</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher safe stainless steel grease filters	2
<b>Lighting</b>	
LED	•
Light intensity in Lx	300
Colour temperature in K	3,000
<b>Fan</b>	
Dual-action fan	•
AC motor	•
<b>Air throughput with max. duct diameter in extraction mode (not for external version)</b>	
Air throughput in Level 1 (m <sup>3</sup> /h)	280
Air throughput in Level 2 (m <sup>3</sup> /h)	420
Air throughput in Level 3 (m <sup>3</sup> /h)	570
Air throughput in Booster level (m <sup>3</sup> /h)	720
Sound power in Level 1 (dB(A) re 1 pW)	47
Sound power in Level 2 (dB(A) re 1 pW)	55
Sound power in Level 3 (dB(A) re 1 pW)	62
Sound power in Booster level (dB(A) re 1 pW)	69
Sound pressure in Level 1 (dB(A) re 20 µPa)	34
Sound pressure in Level 2 (dB(A) re 20 µPa)	41
Sound pressure in Level 3 (dB(A) re 20 µPa)	48
Sound pressure in Booster level (dB(A) re 20 µPa)	55

DA 3496

Slimline rangehood

with energy-efficient LED lighting and light-touch switches for easy use.




<b>Air throughput in recirculation mode</b>	
Air throughput in Level 1 (m <sup>3</sup> /h)	220
Air throughput in Level 2 (m <sup>3</sup> /h)	320
Air throughput in Level 3 (m <sup>3</sup> /h)	420
Air throughput in Booster level (m <sup>3</sup> /h)	500
Sound power in Level 1 (dB(A) re 1 pW)	57
Sound power in Level 2 (dB(A) re 1 pW)	64
Sound power in Level 3 (dB(A) re 1 pW)	68
Sound power in Booster level (dB(A) re 1 pW)	71
Sound pressure in Level 1 (dB(A) re 20 µPa)	57
Sound pressure in Level 2 (dB(A) re 20 µPa)	64
Sound pressure in Level 3 (dB(A) re 20 µPa)	68
Sound power in Booster level (dB(A) re 1 pW)	71
<b>Safety</b>	
Safety switch-off	•
<b>Technical data</b>	
Canopy width in mm	895
Canopy height in mm	34
Canopy depth in mm	275
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	14.0
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.30
Voltage in V	230
Fuse rating in A	10
Number of phases	1
<b>Installation notes</b>	
Extraction ducting connection at top	•
Diameter of extraction ducting connection in mm	150
<b>Standard accessories</b>	
Non-return flap	•
Adapter to reduce ducting diameter from 150 mm to 125 mm Ø	•

DA 3496

Slimline rangehood

with energy-efficient LED lighting and light-touch switches for easy use.

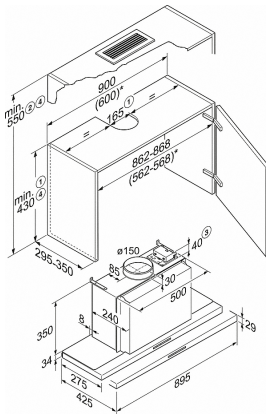

DA 3490, DA 3496 (installation drawing) VG AUS, VG CN, VG SA

1. Extraction mode: when measuring for height of the wall unit and the cut-out, account must be taken of any accessories fitted, e.g. silencer, DSM module.
2. Recirculation mode: with conversion kit DUU 151
3. Optional accessory: DSM 400
4. Installation with kneeling frame DAR 3000: Please attend differing cabinet height (see installation drawing DAR 3000)  
\* can also be installed in a 600 mm wide unit.