

DA 4228 W Puristic Plus

Wall mounted rangehood

with energy-efficient LED lighting and light-touch switches for easy use.



- Timeless design – 1,198mm wide stainless steel rangehood
- Unique user convenience – Con@ctivity
- Powerful – 870m³/h on the booster setting
- Pleasantly quiet – Miele Silence package
- Safe and easy to clean – Miele CleanCover

Construction type	
Wall-mounted rangehood	•
Design	
Colour	Stainless steel
Customisation possible on request	•
Operating modes	
Type of air guide	air extraction
User convenience	
Networking with Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Light-touch controls	•
Miele@mobile app	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Run-on time 5 / 15 min.	•
Grease filter saturation indicator programmable	•
Silence package	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Efficiency and sustainability	
ECO package	•
Filter system	
Number of dishwasher safe stainless steel grease filters	4
Lighting	
LED	•
Light intensity in Lx	440
Colour temperature in K	3,500
Dimmer function	•
Fan	
Dual-action fan	•
ECO motor (DC motor)	•

DA 4228 W Puristic Plus

Wall mounted rangehood

with energy-efficient LED lighting and light-touch switches for easy use.




Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m ³ /h)	310
Air throughput in Level 2 (m ³ /h)	460
Air throughput in Level 3 (m ³ /h)	630
Air throughput in Booster level (m ³ /h)	870
Sound power in Level 1 (dB(A) re 1 pW)	47
Sound power in Level 2 (dB(A) re 1 pW)	56
Sound power in Level 3 (dB(A) re 1 pW)	64
Sound power in Booster level (dB(A) re 1 pW)	72
Sound pressure in Level 1 (dB(A) re 20 µPa)	32
Sound pressure in Level 2 (dB(A) re 20 µPa)	41
Sound pressure in Level 3 (dB(A) re 20 µPa)	49
Sound pressure in Booster level (dB(A) re 20 µPa)	57
Safety	
Safety switch-off	•
Technical data	
Overall height for extraction mode and external mode cooker hoods in mm	685
Canopy width in mm	1,198
Canopy height in mm	62
Canopy depth in mm	500
Net weight in kg	27.0
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.24
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of extraction ducting connection in mm	150
Telescopic chimney	•
Telescopic wall bracket	•
Combination with WiFi-enabled Miele hob	recommended
Standard accessories	
Non-return flap	•
Adapter to reduce ducting diameter from 150 mm to 125 mm Ø	•
RF Con@tivity 2.0 communication stick for KM	XKS 3000 Z

DA 4228 W Puristic Plus

Wall mounted rangehood

with energy-efficient LED lighting and light-touch switches for easy use.

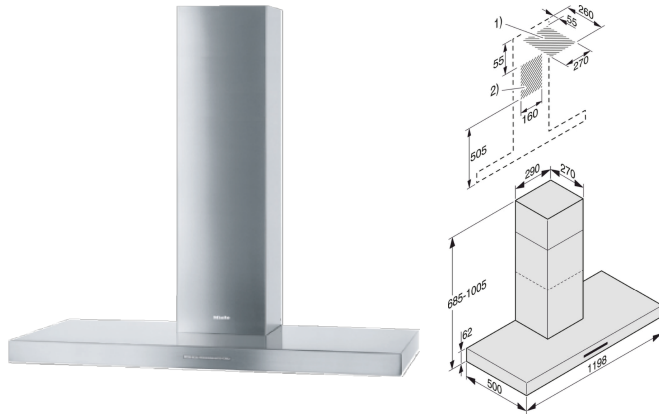

DA 4228 (Installation drawing)

1) and 2) Installation cut-out