

DA 4248 V D Puristic Varia

Island decor rangehoods with energy-efficient LED lighting and light-touch switches for easy use.



- Timeless design – 1,198mm wide stainless steel rangehood
- Unique user convenience – Con@ctivity
- Always at the right height – motorised height adjustment
- Powerful – 820m³/h on the booster setting
- Pleasantly quiet – Miele Silence package

Construction type	
Island <H>rangehood</>	•
Design	
Colour	Stainless steel
Customisation possible on request	•
Operating modes	
Type of air guide	air extraction
User convenience	
Networking with Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Light-touch controls	•
Miele@mobile app	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Run-on time 5 / 15 min.	•
Grease filter saturation indicator programmable	•
Silence package	•
Hood in Motion	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Efficiency and sustainability	
ECO package	•
Filter system	
Number of dishwasher safe stainless steel grease filters	6
Lighting	
LED	•
Light intensity in Lx	600
Colour temperature in K	3,500
Dimmer function	•
Fan	
Dual-action fan	•
ECO motor (DC motor)	•

DA 4248 V D Puristic Varia

Island decor rangehoods


with energy-efficient LED lighting and light-touch switches for easy use.



Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m ³ /h)	290
Air throughput in Level 2 (m ³ /h)	430
Air throughput in Level 3 (m ³ /h)	600
Air throughput in Booster level (m ³ /h)	820
Sound power in Level 1 (dB(A) re 1 pW)	50
Sound power in Level 2 (dB(A) re 1 pW)	60
Sound power in Level 3 (dB(A) re 1 pW)	67
Sound power in Booster level (dB(A) re 1 pW)	75
Sound pressure in Level 1 (dB(A) re 20 µPa)	35
Sound pressure in Level 2 (dB(A) re 20 µPa)	45
Sound pressure in Level 3 (dB(A) re 20 µPa)	52
Sound pressure in Booster level (dB(A) re 20 µPa)	60
Safety	
Safety switch-off	•
Technical data	
Overall height for extraction mode and external mode cooker hoods in mm	755
Canopy width in mm	1,198
Canopy height in mm	70
Canopy depth in mm	698
Net weight in kg	45.0
Hard-wired connection	•
Total rated load in kW	0.42
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Diameter of extraction ducting connection in mm	150
Telescopic chimney	•
Combination with WiFi-enabled Miele hob	recommended
Standard accessories	
Non-return flap	•
RF Con@ctivity 2.0 communication stick for KM	XKS 3000 Z

DA 4248 V D Puristic Varia

Island decor rangehoods
with energy-efficient LED lighting and light-touch switches for easy use.

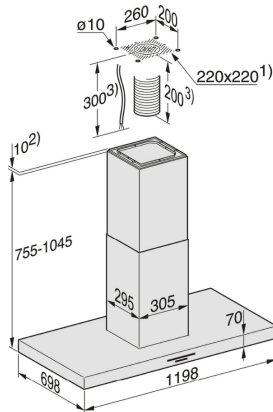

DA 4248 VD (Installation drawing)

- 1) Installation area/site
- 2) Installation alternatively with spacer frame
- 3) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.