

DA 6698 W Puristic Edition 6000

Wall mounted rangehood

with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – 880m<sup>3</sup>/h on the booster setting
- Energy-efficient and quiet – powerful ECO motor
- Pleasantly quiet – Miele Silence package

|  |                 |
|--|-----------------|
| <b>Construction type</b>                                 |                 |
| Wall-mounted rangehood                                   | •               |
| <b>Design</b>  |                 |
| Colour   | Stainless steel |
| Customisation possible on request                        | •               |
| <b>Operating modes</b>                                   |                 |
| Type of air guide  | Convertible     |
| Active charcoal filter (order separately)                | DKF12-1         |
| <b>User convenience</b>                                  |                 |
| Networking with Miele@home                               | •               |
| Automatic function Con@ctivity 3.0 (WiFi)                | •               |
| Electronic controls                                      | •               |
| Touch-on-glass controls                                  | •               |
| Miele@mobile app   | •               |
| Power levels (number without Booster level)              | 3               |
| Booster level  | •               |
| Programmable Booster level switch-off                    | •               |
| Run-on time 5 / 15 min.                                  | •               |
| Grease filter saturation indicator programmable          | •               |
| Active charcoal filter saturation indicator programmable | •               |
| Silence package  | •               |
| <b>Cleaning convenience</b>                              |                 |
| Easy-to-clean canopy interior – CleanCover               | •               |
| <b>Efficiency and sustainability</b>                     |                 |
| ECO package  | •               |
| <b>Filter system</b>                                     |                 |
| Number of dishwasher safe stainless steel grease filters | 3               |
| <b>Lighting</b>  |                 |
| LED  | •               |
| Light intensity in Lx                                    | 670             |
| Colour temperature in K                                  | 3,500           |
| Dimmer function  | •               |
| <b>Fan</b>   |                 |
| Dual-action fan  | •               |
| ECO motor (DC motor)                                     | •               |

DA 6698 W Puristic Edition 6000

Wall mounted rangehood

with energy-efficient LED lighting and touch controls for simple operation.



| <b>Air throughput with max. duct diameter in extraction mode (not for external version)</b> |      |
|---|------|
| Air throughput in Level 1 (m <sup>3</sup> /h)   | 320  |
| Air throughput in Level 2 (m <sup>3</sup> /h)   | 480  |
| Air throughput in Level 3 (m <sup>3</sup> /h)   | 640  |
| Air throughput in Booster level (m <sup>3</sup> /h)   | 880  |
| Sound power in Level 1 (dB(A) re 1 pW)  | 46   |
| Sound power in Level 2 (dB(A) re 1 pW)  | 56   |
| Sound power in Level 3 (dB(A) re 1 pW)  | 64   |
| Sound power in Booster level (dB(A) re 1 pW)  | 72   |
| Sound pressure in Level 1 (dB(A) re 20 µPa)   | 31   |
| Sound pressure in Level 2 (dB(A) re 20 µPa)   | 41   |
| Sound pressure in Level 3 (dB(A) re 20 µPa)   | 49   |
| Sound pressure in Booster level (dB(A) re 20 µPa)   | 57   |
| <b>Air throughput in recirculation mode</b>   |      |
| Air throughput in Level 1 (m <sup>3</sup> /h)   | 200  |
| Air throughput in Level 2 (m <sup>3</sup> /h)   | 330  |
| Air throughput in Level 3 (m <sup>3</sup> /h)   | 390  |
| Air throughput in Booster level (m <sup>3</sup> /h)   | 460  |
| Sound power in Level 1 (dB(A) re 1 pW)  | 55   |
| Sound power in Level 2 (dB(A) re 1 pW)  | 65   |
| Sound power in Level 3 (dB(A) re 1 pW)  | 68   |
| Sound power in Booster level (dB(A) re 1 pW)  | 73   |
| Sound pressure in Level 1 (dB(A) re 20 µPa)   | 40   |
| Sound pressure in Level 2 (dB(A) re 20 µPa)   | 50   |
| Sound pressure in Level 3 (dB(A) re 20 µPa)   | 53   |
| Sound power in Booster level (dB(A) re 1 pW)  | 58   |
| <b>Safety</b>   |      |
| Safety switch-off   | •    |
| Single pane tempered glass  | •    |
| <b>Technical data</b>   |      |
| Overall height for extraction mode and external mode cooker hoods in mm                     | 710  |
| Overall height for recirculation mode cooker hoods in mm                                    | 840  |
| Canopy width in mm  | 898  |
| Canopy height in mm   | 85   |
| Canopy depth in mm  | 500  |
| Net weight in kg  | 26.0 |
| Length of supply lead in m  | 1.5  |
| Standard plug fitted  | •    |
| Total rated load in kW  | 0.24 |
| Voltage in V  | 230  |
| Fuse rating in A  | 10   |
| Number of phases  | 1    |

DA 6698 W Puristic Edition 6000

Wall mounted rangehood  
with energy-efficient LED lighting and touch controls for simple operation.




| <b>Installation notes</b>                                  |             |
|--|-------------|
| Extraction ducting connection at top                       | •           |
| Extraction connection at top and rear                      | •           |
| Diameter of extraction ducting connection in mm            | 150         |
| Telescopic chimney   | •           |
| Telescopic wall bracket                                    | •           |
| Combination with WiFi-enabled Miele hob                    | recommended |
| <b>Standard accessories</b>                                |             |
| Non-return flap  | •           |
| Adapter to reduce ducting diameter from 150 mm to 125 mm Ø | •           |
| RF Con@ctivity 2.0 communication stick for KM              | XKS 3000 Z  |

DA 6698 W Puristic Edition 6000

Wall mounted rangehood

with energy-efficient LED lighting and touch controls for simple operation.

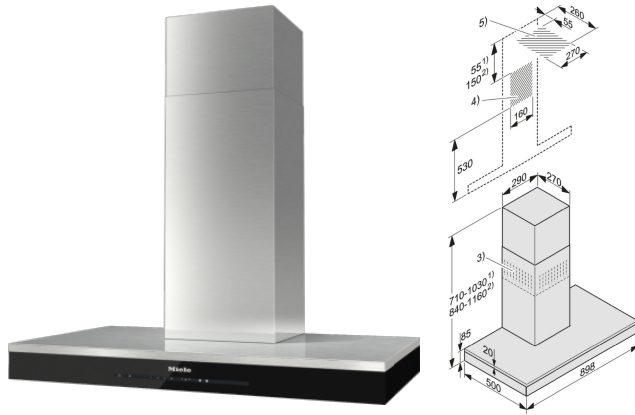

DA 6698 W, CLST (Installation drawing)

1. Extraction
2. Recirculation
- 3 Ventilation grilles at the top for recirculation
4. + 5. Vent cut-out positions (Area 5 not required for recirculation)