



GW451120

BA080670:

Vacuuming bags, 180 x 280 mm, 100 pcs.

BA080680:

Vacuuming bags, 240 x 350 mm, 100 pcs.

warming drawer Gaggenau Expressive series

60 x 14 cm

GW451120

- Handleless opening with a light push for convenience and style
- Hygienic stainless steel and glass interior for effortless cleaning and elegant design
- Six power levels and four heating modes ensure consistent temperature control for various culinary needs
- Seamlessly integrated with multiple Gaggenau appliances, offering flexibility and a harmonious aesthetics

Highlights

Handleless drawer

Bright interior lighting

Push-to-open function.

Hygienic stainless steel interior with glass bottom

Direct temperature selection in the range 30 °C to 80 °C.

Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

Heating methods

Preheating of small beverage containers/cups.

Warming ovenware.

Keeping meals warm.

Low-temperature cooking.

Direct temperature control.

Personalisation function via Home Connect.

16 additional programmes via Home Connect.

Capacity

Touch key operation.

Features

Net volume 20 litres.

Volume capacity: Dinner service for 6 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.

Capacity load max. 25 kg.

Usable interior dimensions

W 548 mm x H 92 mm x D 410 mm.

Heating system for even heat distribution and stable cavity temperature.

Status indicator, visible on the frame.

Glass bottom made of safety glass.

Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.

Remote control and monitoring.

Timing function.

Performance

Plan the niche without back wall.

Protrusion from appliance front to furniture cabinet 42 mm.

Installation of GO/GS/GM/GC directly above the drawer without intermediate shelf.


Drawers installed above a dishwasher need a specific niche.

The socket can be planned behind the appliance.

Connection

Total connected load 0.82 KW.

Connection cable 1.75 m, detachable.

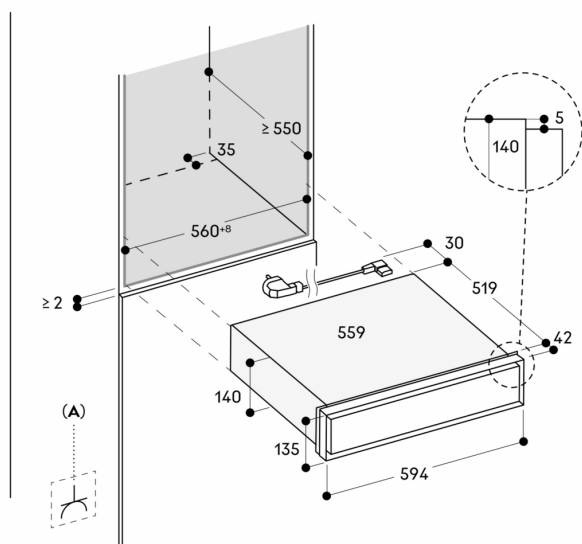

A: Accessible electrical connection

Measurements in mm