



#### Color Variants

**CMP250112**  
Full glass door in Gaggenuau Metallic  
Width 60 cm

#### Included accessories

1 x assembly screws.  
1 x scoop.  
1 x test strip.  
1 x milk container (insulated).  
1 x connection hose for milk frother.  
1 x milk pipe.

**CMP250112**  
Fully automatic espresso machine 200 series  
Full glass door in Gaggenuau Metallic  
Width 60 cm  
Controls at the top

Handless door / cushioned door closing system  
Continuous flow heater means no waiting time and constant brewing temperature  
Aroma brewing technology for a full aroma  
Single portion cleaning  
TFT touch display  
Panel-free appliance with surface control module  
One-touch operation  
Personalisation function  
7 light settings  
Electronic fill level control for milk, water and coffee to ensure a perfect result

#### Type of beverage

Ristretto / 2 x Ristretto.  
Espresso / 2 x Espresso. Espresso Macchiato / 2 x Espresso Macchiato.  
Coffee / 2 x Coffee. Americano / 2 x Americano. Caffè Latte / 2 x Caffè Latte. Latte Macchiato / 2 x Latte Macchiato. Cappuccino / 2 x Cappuccino. Flat White / 2 x Flat White.  
Milk froth / 2 x Milk froth. Warm milk / 2 x Warm milk. Hot water / 2 x Hot water.

#### Capacity

Door with cushioned door closing system.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Personalisation function, option to save 8 individualised beverages.  
4 beverage size settings, volume can be individually adjusted to match the size of the cup.  
8 coffee strength levels from very mild to extra strong.  
Coffee: 3 grades.  
Hot water: 10 grades.  
4 coffee-milk ratio levels.  
Adjustable grinding level.  
Height-adjustable coffee dispenser 7 cm to 15 cm.  
Easy access to water tank, milk and coffee bean container behind the door.

#### Features

Maintenance-free grinding unit with ceramic discs.  
Separate drawer for second ground coffee type.  
Water pump with 19 bar pressure.  
Double grinding and brewing cycles for extra intensity for single beverage order.  
For double beverage order, two grinding and brewing cycles.  
Beverage dispenser with integrated milk system.  
Insulated stainless steel milk container for up to 0.5 litres.  
Integrated lightning with LEDs.  
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.  
Automatic adjustment of ground coffee quantity.  
Removable 2.4 litre water tank.  
Electronic water filter exchange indicator.  
Electronic fill level control for drip tray and container for coffee residue.

#### Characteristics

Built-in / Free-standing

Built-in

Net weight

20.3

Gross weight

22.9

Dimensions

455 x 590 x 426

Dimensions of the packed product (HxWxD)

540 x 478 x 670

Required niche size for installation (HxWxD)

449 x 558 x 356

EAN code

4242006278922

Electrical connection rating

1600

Fuse protection

10

Voltage

220-240

Frequency

50/60

Length electrical supply cord

170.0

#### Consumption and connection features

2022-11-28

Page 1

Home network integration for digital services (Home Connect) either via cable connection LAN or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

#### Safety

Child lock.

#### Cleaning

Fully automatic rinse programme when machine is turned on/off.

Automatic steam cleaning of the milk system after every beverage.

Automatic cleaning and descaling programme.

Emptying programme to prepare the appliance for holiday or transportation.

Empty-grinding function to remove coffee residues from the system when switching bean types.

Removable brewing unit.

Dishwasher-safe coffee residue container and drip tray.

Dishwasher-safe beverage dispenser.

#### Performance

Ideal installation height 95 cm to 145 cm (top edge of niche bottom).

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

When installing in a corner a side clearance is required.

Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.

Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.

Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).

Installation directly above 14 cm high warming drawer in 59 cm standardised niche.

The LAN port can be found at the back on the lower right side.

Special accessories (order as spare parts):

Part No. 17000705 Water filter Part No. 00311819 Descaling tablets Part No.

00311769 Cleaning tablets Part No. 00636455 Door hinge restrictor (92°

opening angle) Part No. 11015223 Bean container with lid

#### Connection

Total connected load 1.6 KW.

Connection cable 1.7 m with plug.

Plan a LAN cable.

Power consumption standby/display off 0.5 W.


Power consumption standby/network 2.0 W.

Time auto-standby/display on 30 min.


Time auto-standby/network 30 min.

Please check the user manual for how to switch off the WiFi module.

# GAGGENAU

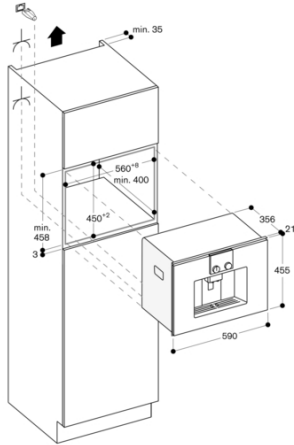

Left corner installation

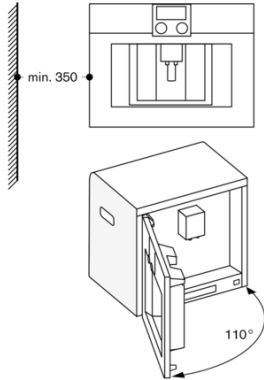

If using the 92° door hinge restrictor (spare part no. 00636455),  
the minimum distance from the wall is only 100 mm.