



Color Variants

CI262105

Frameless

Width 60 cm

CI262105
Flex induction cooktop 200 series
Frameless
Width 60 cm

Frameless for flush mounting
Flex function for combining the rectangular cooking areas
Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
Cooking sensor function for temperature control in pots
Professional cooking function for splitting the cooktop into 3 predefined heat areas
Frying sensor function for temperature control in pans
Twist-Pad control with removable magnetic knob
Easy control of all functions with bicoloured display

Cooking zones
2 flex induction cooking areas with each 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

Capacity
Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 cooking power levels.

Features
Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).
Home network integration for digital services (Home Connect) wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety
Main switch.
Operation indicator.
Pot detection.
digital 2-step
Child lock.
Safety shut-off.


Performance
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
The wok pan WP 400 001 cannot be used with this appliance.
Appliance must be fixed from underneath.
Appliance weight: approx. 16. kg

Connection
Total connected load 7.4 KW.

Characteristics
Product name/family
Cooking zone ceramic
Construction type
Built-in
Energy input
Electric
Total number of positions that can be used at the same time
4
Type of control setting devices
Required niche size for installation (HxWxD)
Width of the appliance
572
Dimensions
56 x 572 x 512
Dimensions of the packed product (HxWxD)
126 x 753 x 608
Net weight
15.8
Gross weight
17.0
Residual heat indicator
Separate
Location of control panel
Hob front
Type of external control possibility
Basic surface material
Ceramic
Color of surface
Black
Color of frame
Approval certificates
AENOR, CE
Length electrical supply cord
150
EAN code
4242006287900
Electrical connection rating
7400
Gas connection rating
Fuse protection
Voltage
220-240
Frequency
50-60


Consumption and connection features
2022-10-03
Page 1

Connecting cable 1.5 m without plug.
Power consumption standby/display off 0.5 W.
Power consumption standby/network 2.0 W.
Please check the user manual for how to switch off the WiFi module.

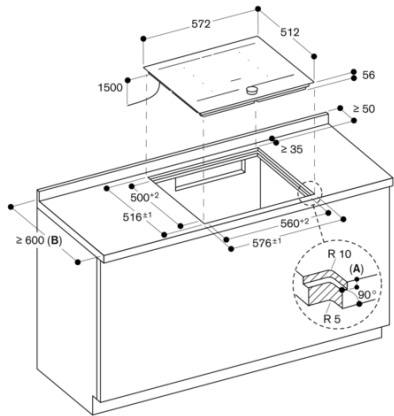


A: $6.5^{+0.5}$
B: Please check the installation manual if the worktop depth is less than 600 mm.
measurements in mm

Longitudinal section

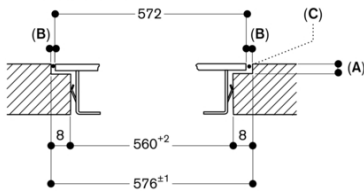


A: $6.5^{+0.5}$
B: 2.5
C: Fill with silicone
measurements in mm

View from above



measurements in mm

Cross-section

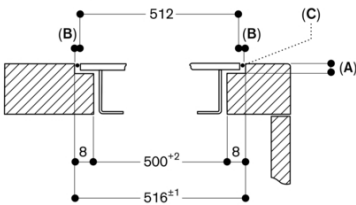

A: $6.5^{+0.5}$
B: 2.5
C: Fill with silicone
measurements in mm