



Color Variants

RB289500

With fresh cooling close to 0 °C

Fully integrated

Included accessories

2 x cold accumulator.

3 x egg tray.

1 x ice cube tray with lid.

2 x wooden bottle holder magnetic.

RB289500

Vario fridge-freezer combination 200 series

With fresh cooling close to 0 °C

Fully integrated

Niche width 56 cm, Niche height 177.5 cm



Interior with precision-fitted, solid aluminium elements in Gaggenua Light Bronze

Extendable shelves and drawers

4 climate zones incl. two fresh cooling drawers close to 0 °C

Height-adjustable, extendable safety glass shelves, set in solid aluminium profiles

Cushioned door closing system allowing a soft and controlled door closure

Smooth running fully extendable telescopic pull-out racks and a cushioned closing system allow a soft and controlled closure of the drawers
Solid maple bottle supports with magnetic connector

Consumption Rates

3.5 Energy star rating

Energy consumption 260 kWh

Noise level 37 dB (re 1 pW).

Capacity

Total volume 233 litres

Electronic temperature control with digital display.

Touch keys.

Technical Information

Automatic defrosting with defrost water evaporation.

Cushioned door closing system from 20° door opening angle, integrated in door hinge.

Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Cooling

Fast cooling.

Temperature adjustable from +3 °C to +8 °C.

1 frosted white glass shelf.

2 oiled, solid maple bottle supports with magnetic connector, can be increased to 5 supports per shelf.

A total of 9 bottles (based on a 0.75 l bottle) can be stored on one level using 5 bottle supports.

The bottle supports are also suitable for storing champagne bottles and magnums.

1 large aluminium door rack for bottles.
Net fridge capacity total: 156 l litres.

Fresh cooling close to 0 °C

Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.

1 fully extendable fresh cooling drawer close to 0 °C, illuminated.

Humidity can be adjusted manually. Ideal for fruit and vegetables.

1 fully extendable fresh cooling drawer close to 0 °C, illuminated.

Ideal for meat, fish and poultry.

Total volume 552 litre

Freezing

No-frost technology with fast freezing. Temperature adjustable from -14 °C to -24 °C.

Defrost assistance.

Characteristics

Energy Efficiency Class (Regulation (EU) 2017/1369)

D

Annual energy consumption AU

260

Freezer Net capacity

67

Refrigerator Net capacity

156

Airborne acoustical noise emissions (EU 2017/1369)

37

Airborne acoustical noise emission class (EU 2017/1369)

C

Built-in / Free-standing

Built-in

Door panel options

Not possible

Height

1772

Width of the appliance

558

Depth of the product

545

Min. required niche size for installation (HxWxD)

1775.0 x 560 x 550

Net weight

72.6

Connection Rating

90

Fuse protection

10

Door hinge

Right reversible

Voltage

220-240

Frequency

50

Length electrical supply cord

230

Storage Period in Event of Power Failure (h)

8

Number of compressors

1

Number of independent cooling systems

2

Interior ventilator

No

Reversible Door Hinge

Yes

Number of Adjustable Shelves in fridge compartment

2

Shelves for Bottles

Yes

Frost free system

Freezer

Installation typology

Full-integrated

Type of hinge

Flush-folding

Annual energy consumption AU

260

Consumption and connection features

2022-12-03

Page 1

Freezing capacity 13 kg/24 h.

Storage time after a malfunction 13 h.

3 freezer drawers, 1 of which extra large.

2 safety glass shelves.

Total volume 84 l.

Performance

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight:

Upper door 18 kg. Lower door 18 kg.

Connection

Total connected load 0.090 KW.

Connecting cable 2.3 m with plug.

GAGGENAU

RB289500

Vario fridge-freezer combination 200 series





With fresh cooling close to 0 °C

Fully integrated

Niche width 56 cm, Niche height 177.5 cm

2022-12-03

Page 2

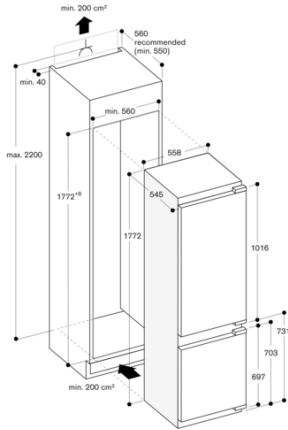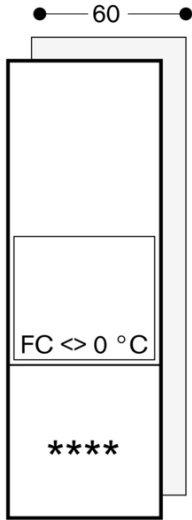

A: Air inlet $\geq 200\text{ cm}^2$; ventilation options A1 or A2
B: Air outlet $\geq 200\text{ cm}^2$; ventilation options B1 or B2

GAGGENAU