



Color Variants

RC289500
With fresh cooling close to 0 °C
Fully integrated

Included accessories

3 x egg tray.
 1 x bottle holder in door tray.
 2 x wooden bottle holder magnetic.

RC289500
Vario refrigerator 200 series
With fresh cooling close to 0 °C
Fully integrated
Niche width 56 cm, Niche height 177.5 cm



Interior with precision-fitted, solid aluminium elements in Gaggeneau Light Bronze
 Extendable shelves and drawers
 Intelligent lighting concept
 3 climate zones incl. three fresh cooling drawers close to 0 °C
 Height-adjustable, extendable safety glass shelves, set in solid aluminium profiles
 Combines with freezer RF 287 (Side-by-side integration)
 Cushioned door closing system allowing a soft and controlled door closure
 Smooth running fully extendable telescopic pull-out racks and a cushioned closing system allow a soft and controlled closure of the drawers
 Solid maple bottle supports with magnetic connector

Capacity

Total volume 289 litres
 Electronic temperature control with digital display.
 Touch keys.

Consumption Rates

4 Energy star Rating
 Energy consumption 155 kWh
 Noise level 36 dB (re 1 pW).

Technical Information

Automatic defrosting with defrost water evaporation.
 Cushioned door closing system from 20° door opening angle, integrated in door hinge.
 Open-door and malfunction alarm.

Cooling

Fast cooling.
 Temperature adjustable from +3 °C to +8 °C.
 7 safety glass shelves, height adjustable, of which 1 is extendable.
 1 frosted white glass shelf.
 2 oiled, solid maple bottle supports with magnetic connector, can be increased to 5 supports per shelf.
 A total of 9 bottles (based on a 0.75 l bottle) can be stored on one level using 5 bottle supports.
 The bottle supports are also suitable for storing champagne bottles and magnums.
 1 large aluminium door rack for bottles.
 4 aluminium door racks.
 Warm white interior lighting (3500 K) with integrated glare-free side lights.
 Net fridge capacity total: 289 l litres.

Fresh cooling close to 0 °C

Drawers with solid aluminium handles and signature drawer front with a gradual frosted surface.
 1 fully extendable fresh cooling drawer close to 0 °C, illuminated.
 Humidity can be adjusted manually.
 Ideal for fruit and vegetables.
 2 fully extendable fresh cooling drawers close to 0 °C, illuminated.
 Ideal for meat, fish and poultry.
 Total volume without *

Performance

Flat hinge.
 Door hinge right, reversible.
 Door opening angle of 115°, fixable at 90°.

Characteristics

Energy Efficiency Class (Regulation (EU) 2017/1369)
 D

Annual energy consumption AU
 155

Freezer Net capacity
 0

Refrigerator Net capacity
 289

Airborne acoustical noise emissions (EU 2017/1369)
 36

Airborne acoustical noise emission class (EU 2017/1369)
 C

Built-in / Free-standing
 Built-in

Door panel options
 Not possible

Height
 1772

Width of the appliance
 558

Depth of the product
 545

Min. required niche size for installation (HxWxD)
 1775.0 x 560 x 550

Net weight
 71.9

Connection Rating
 90

Fuse protection
 10

Door hinge
 Right reversible

Voltage
 220-240

Frequency
 50

Length electrical supply cord
 230

Storage Period in Event of Power Failure (h)
 1

Number of compressors
 1

Number of independent cooling systems
 1

Interior ventilator
 No

Reversible Door Hinge
 Yes

Number of Adjustable Shelves in fridge compartment
 6

Shelves for Bottles
 No

Capacity of Water Tank
 No

EAN code
 4242006296995

Brand
 Gaggeneau

Product name / Commercial code
 RC289500

Product category
 Refrigerator

Frost free system
 No

Installation typology
 Full-integrated

Annual energy consumption AU
 155

Included accessories
 3 x egg tray, 1 x bottle holder in door tray, 2 x wooden bottle holder magnetic

Consumption and connection features





2022-12-02
 Page 1

Max. door panel weight 22 kg.
 For a side-by-side installation every appliance must be planned in its own niche.

Connection

Total connected load 0.090 KW.
 Connecting cable 2.3 m with plug.

RC289500
 Vario refrigerator 200 series
 With fresh cooling close to 0 °C
 Fully integrated
 Niche width 56 cm, Niche height 177.5 cm
 2022-12-02
 Page 2

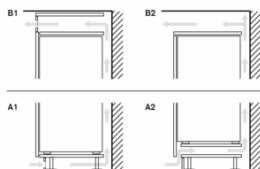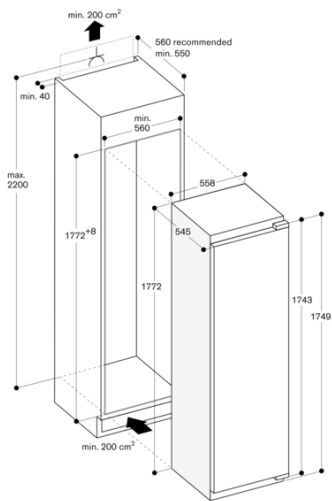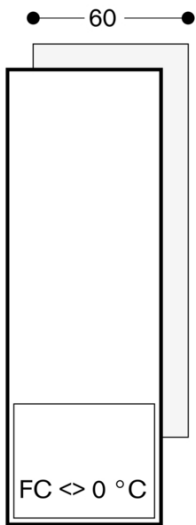

A: Air inlet \geq 200 cm²; ventilation options A1 or A2
 B: Air outlet \geq 200 cm²; ventilation options B1 or B2