



**BSP221101**  
**Steam oven 200 Series**  
**Full glass door in Gaggenau Anthracite**  
**Width 60 cm**  
**left-hinged**  
**Controls at the top**

#### Color Variants

**BSP221101**  
**Full glass door in Gaggenau Anthracite**  
**Width 60 cm**

#### Included accessories

1 x grid.  
 1 x STS tray, punched.  
 40 mm deep.  
 1 x STS tray, unpunched.  
 40 mm deep.

Flush installation  
 Water tank  
 Large cavity  
 LED light source  
 External steam generation  
 Steaming without pressure with 100% humidity from 30 °C to 100 °C  
 Sous-vide cooking with accurate temperature regulation  
 TFT touch display  
 Panel-free appliance with surface control module  
 Electronic temperature control from 30 °C to 100 °C  
 Net volume 59 litres

#### Heating methods

100 % humidity.  
 Sous-vide cooking. Dough proofing.  
 Defrosting. Regenerating. Low temperature steaming.

#### Capacity

Rotary knob and TFT touch display operation.  
 Clear text display.  
 Personalisation of automatic programmes.  
 Information key with use indicators.  
 Side-opening door opens up to 110° angle.

#### Features

Removable 1.7 litre water tank.  
 Water level warning.  
 Actual temperature display.  
 Automatic boiling point detection.  
 LED light on the side.  
 Hygienic stainless steel cooking interior.  
 3 tray levels.  
 Home network integration for digital services (Home Connect) either via cable connection LAN or wireless via WiFi.  
 The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

#### Safety

Child lock.  
 Safety shut-off.  
 Cooled housing with temperature protection.

#### Cleaning

Cleaning aid.  
 Descaling programme for the steam generator.

#### Performance

Door hinge not reversible.  
 No other electrical appliances should be installed above the BS.  
 The door panel surface of the appliance extends 21 mm from the furniture cavity.  
 The outer edge of the door handle extends 72 mm from the furniture cavity.  
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.  
 When planning a corner solution, pay attention to the 110° door opening angle.  
 The mains socket needs to be planned outside the built-in niche.  
 The LAN port can be found at the back on the lower left side.

#### Characteristics


**Color / Material Front**  
 Anthracite  
**Built-in / Free-standing**  
 Built-in  
**Door opening**  
 Lateral  
**Min. required niche size for installation (HxWxD)**  
 450-450 x 560-560 x 550  
**Dimensions**  
 455 x 590 x 540  
**Dimensions of the packed product (HxWxD)**  
 590 x 660 x 700  
**Control Panel Material**  
 without panel  
**Door Material**  
 Glass  
**Net weight**  
 36.0  
**Approval certificates**  
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE  
**Length electrical supply cord**  
 175  
**EAN code**  
 4242006278212  
**Connection Rating**  
 2750  
**Fuse protection**  
 16  
**Voltage**  
 220-240  
**Frequency**  
 50-60  
**Plug type**  
 Gardy plug w/ earthing  
**Approval certificates**  
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE  
**Included accessories**  
 1 x grid, 1 x STS tray, punched, 40 mm deep, 1 x STS tray, unpunched, 40 mm deep

#### Consumption and connection features

2022-11-15  
 Page 1


Total connected load 2.8 KW.  
 Connecting cable 1.8 m with plug.  
 Plan a LAN cable.  
 Power consumption standby/display on 0.8 W.  
 Power consumption standby/display off 0.5 W.  
 Power consumption standby/network 1.8 W.  
 Time auto-standby/display on 20 min.  
 Time auto-standby/display off 20 min.  
 Time auto-standby/network 20 min.  
 Please check the user manual for how to switch off the WiFi module.

BSP221101  
Steam oven 200 Series  
Full glass door in Gaggenau Anthracite  
Width 60 cm  
left-hinged  
Controls at the top  
2022-11-15  
Page 2

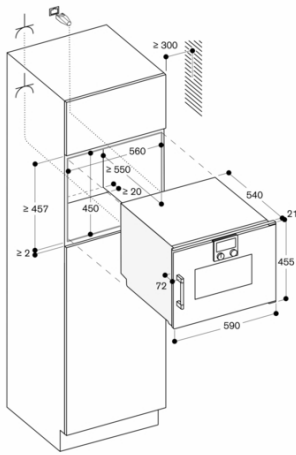

Socket  
measurements in mm

Side view of BSP 220/250 above BOP

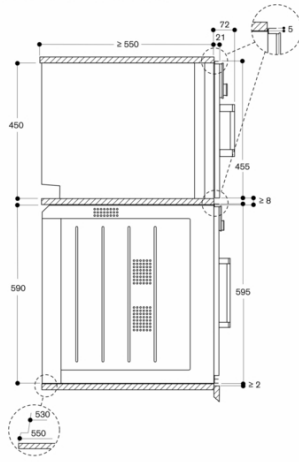

measurements in mm