



BSP221111
Steam oven 200 Series
Full glass door in Gaggenau Metallic
Width 60 cm
left-hinged
Controls at the top

Flush installation
 Water tank
 Large cavity
 LED light source
 External steam generation
 Steaming without pressure with 100% humidity from 30 °C to 100 °C
 Sous-vide cooking with accurate temperature regulation
 TFT touch display
 Panel-free appliance with surface control module
 Electronic temperature control from 30 °C to 100 °C
 Net volume 59 litres

Heating methods
 100 % humidity.
 Sous-vide cooking. Dough proofing.
 Defrosting. Regenerating. Low temperature steaming.

Capacity
 Rotary knob and TFT touch display operation.
 Clear text display.
 Personalisation of automatic programmes.
 Information key with use indicators.
 Side-opening door opens up to 110° angle.

Features
 Removable 1.7 litre water tank.
 Water level warning.
 Actual temperature display.
 Automatic boiling point detection.
 LED light on the side.
 Hygienic stainless steel cooking interior.
 3 tray levels.
 Home network integration for digital services (Home Connect) either via cable connection LAN or wireless via WiFi.
 The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety
 Child lock.
 Safety shut-off.
 Cooled housing with temperature protection.

Cleaning
 Cleaning aid.
 Descaling programme for the steam generator.

Performance
 Door hinge not reversible.
 No other electrical appliances should be installed above the BS.
 The door panel surface of the appliance extends 21 mm from the furniture cavity.
 The outer edge of the door handle extends 72 mm from the furniture cavity.
 Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
 When planning a corner solution, pay attention to the 110° door opening angle.
 The mains socket needs to be planned outside the built-in niche.
 The LAN port can be found at the back on the lower left side.

Characteristics
Color / Material Front
Built-in / Free-standing
 Built-in
Door opening
 Lateral
Min. required niche size for installation (HxWxD)
 450-450 x 560-560 x 550
Dimensions
 455 x 590 x 540
Dimensions of the packed product (HxWxD)
 590 x 660 x 700
Control Panel Material
 without panel
Door Material
 Glass
Net weight
 36.0
Approval certificates
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord
 175
EAN code
 4242006278236
Connection Rating
 2750
Fuse protection
 16
Voltage
 220-240
Frequency
 50-60
Plug type
 Gardy plug w/ earthing
Approval certificates
 Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE
Included accessories
 1 x grid, 1 x STS tray, punched, 40 mm deep, 1 x STS tray, unpunched, 40 mm deep

Consumption and connection features

2022-11-15
 Page 1

Total connected load 2.8 KW.
 Connecting cable 1.8 m with plug.
 Plan a LAN cable.
 Power consumption standby/display on 0.8 W.
 Power consumption standby/display off 0.5 W.
 Power consumption standby/network 1.8 W.
 Time auto-standby/display on 20 min.
 Time auto-standby/display off 20 min.
 Time auto-standby/network 20 min.
 Please check the user manual for how to switch off the WiFi module.


Color Variants

BSP221111
Full glass door in Gaggenau Metallic
Width 60 cm

Included accessories


1 x grid.
 1 x STS tray, punched.
 40 mm deep.
 1 x STS tray, unpunched.
 40 mm deep.

BSP221111
Steam oven 200 Series
Full glass door in Gaggenau Metallic
Width 60 cm
left-hinged
Controls at the top
2022-11-15
Page 2

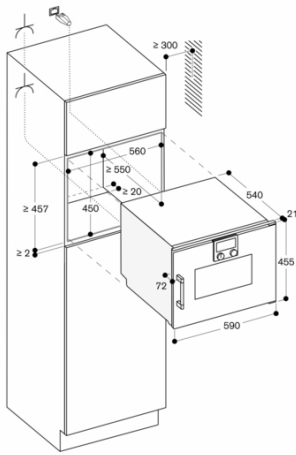

Socket
measurements in mm

Side view of BSP 220/250 above BOP

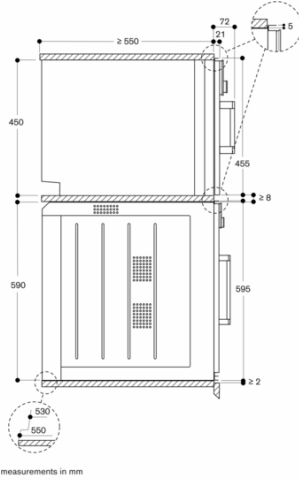

measurements in mm