

## CONVECTION STEAM OVENS

### Convection Steam Ovens

The legacy of the “combination oven” goes back decades, to innovative chefs in America and Europe who embraced the combination of air movement with superheated steam to achieve superior results—from breads and roasts to delicate fishes, seafood, and vegetables. Wolf combines the benefits of convection and steam for the most innovative steam oven on the market today. Virtually any dish prepared in a conventional oven, range, or microwave can also be prepared in the Wolf convection steam oven—with more control. Two widths and three distinct styles compliment the look of Wolf ovens, ranges, and cooktops. Convection steam ovens can be installed in a standard or flush inset application.

### CONVECTION STEAM OVENS


#### TRANSITIONAL



ICBCSO24TE/S/TH




ICBCSO30TM/S/TH



ICBCSO30TE/S/TH

#### PROFESSIONAL



ICBCSO30PM/S/PH



ICBCSO30PE/S/PH

#### CONTEMPORARY





ICBCSO30CM/B/TH

## CONVECTION STEAM OVENS

### Convection Steam Ovens

#### TRANSITIONAL

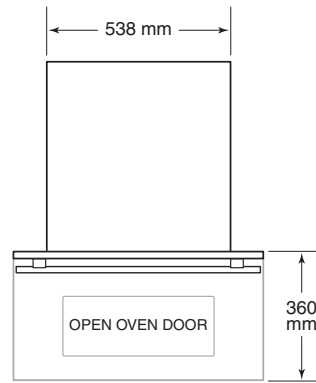
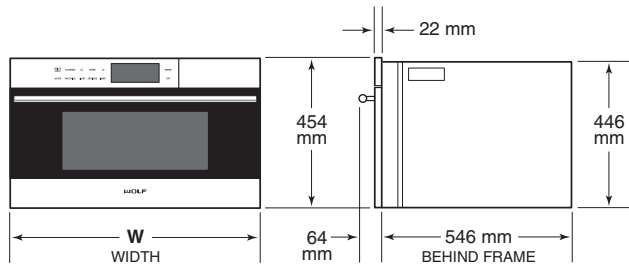


#### WIDTH



#### W

60 cm Transitional	597 mm
76 cm Transitional	759 mm

#### PROFESSIONAL

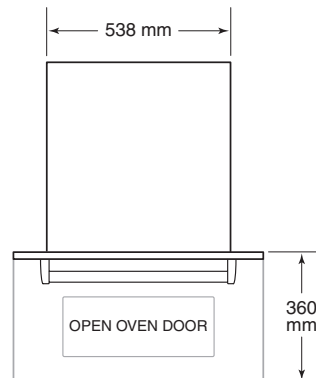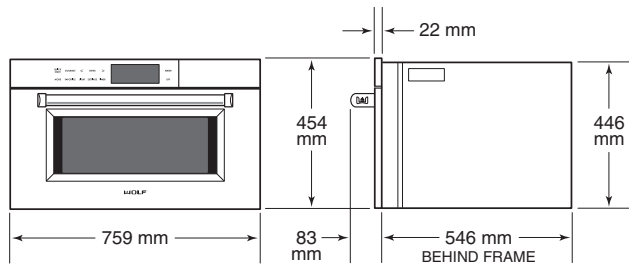

#### CONTEMPORARY

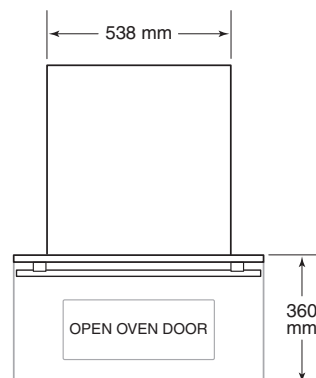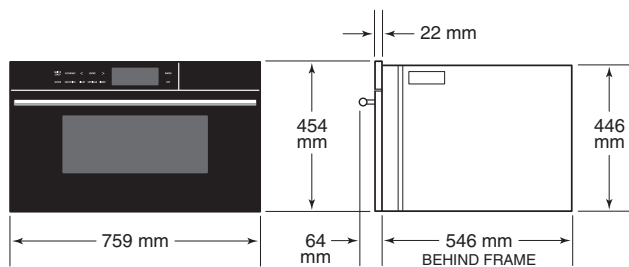

## CONVECTION STEAM OVENS

### Planning Information

The convection steam oven can be installed in a standard or flush inset application.

Finish the edges of the opening. They may be visible when the door is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 3 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

#### INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
60 cm Model		45 kg
76 cm Model		45 kg
TRIM OVERLAP		
	60 cm MODEL	76 cm MODEL
Top	5 mm	5 mm
Bottom	0 mm	0 mm
Sides	18 mm	98 mm

#### ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.

Performance may be compromised if the electrical supply is less than 220 volts.


#### ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50 Hz
Service	3800 W
Receptacle	grounding-type (earthed)
Power Cord	1.8 m


## CONVECTION STEAM OVENS

### Convection Steam Oven


#### STANDARD INSTALLATION

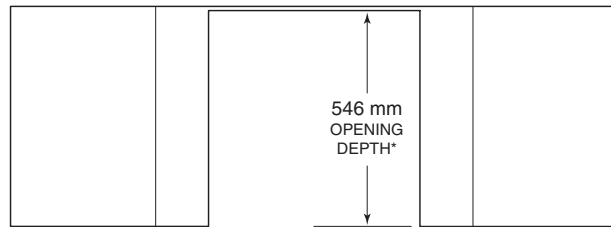

TOP VIEW

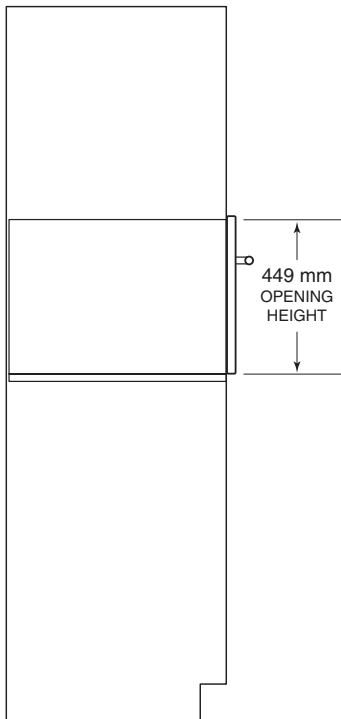

SIDE VIEW

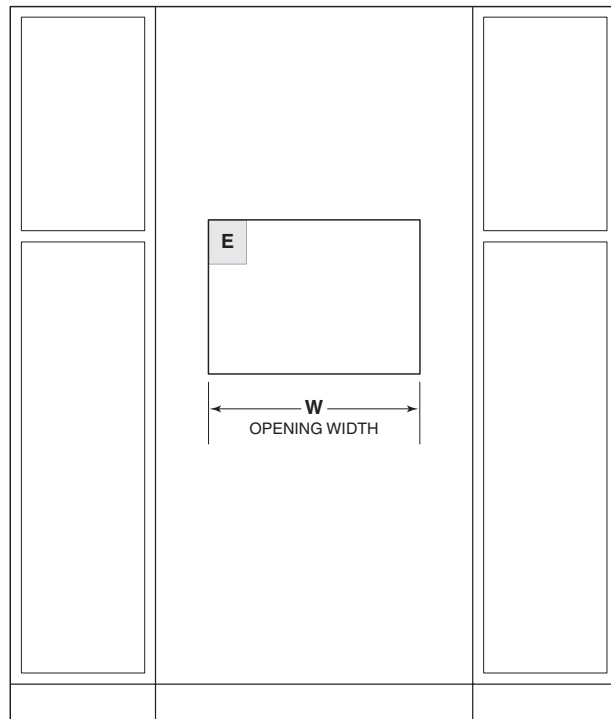

FRONT VIEW



\*Does not include additional depth for the electrical connection.  
NOTE: Both 60 cm and 76 cm models require the same opening dimensions.

OPENING WIDTH	W
60 cm Model	562 mm
76 cm Model	562 mm


## CONVECTION STEAM OVENS

### Convection Steam Oven

#### FLUSH INSET INSTALLATION

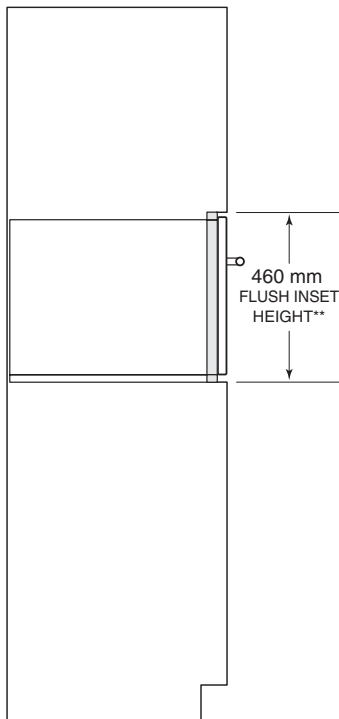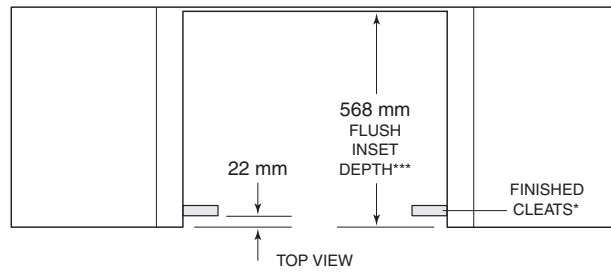

SIDE VIEW

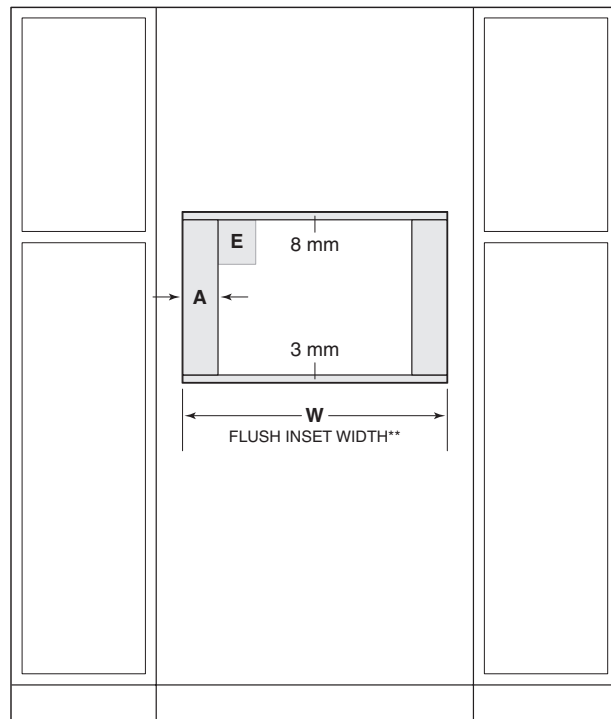

FRONT VIEW

\*Will be visible and should be finished to match cabinetry.

\*\*Dimension provides minimum reveals.

\*\*\*Does not include additional depth for the electrical connection.

FLUSH INSET WIDTH	W	A
60 cm Model	603 mm	21 mm
76 cm Model	765 mm	102 mm