



DUAL FUEL RANGE - 4 BURNERS W.760 ICBDF304

- Dual convection oven for faster, more consistent cooking
- 10 cooking modes make meals easy
- Dual-stacked burners produce up to 20,000 Btu
- Burners capable of delivering less than 300 Btu for premier simmer performance
- Cobalt blue porcelain interior
- Exclusive pivoting control panel
- Continuous cast-iron grates for easy movement of pots and pans
- Three knob options.
- Gas: LP or NG
- Dimensions: 759 W x 749 D x 937 H
- Power Requirements: 20 amps

SPECIFICATIONS

- Dual-stacked, sealed burners for precise control and easy cleanup.
- Patented digital oven control knob.
- Dual convection: two fans for even heat distribution.
- Ten cooking modes, including the bake stone and dehydration kits for precise, easy-to-use control.
- Flame recognition and automatic reignition for safety and ease of use.
- Full-extension bottom rack for easier access to foods.
- Spring and damper door hinge for quiet, effortless opening and closing.
- Natural or LP gas rangetop with large capacity dual convection electric oven
- Specify knob finish at time of purchase - your choice of black, stainless steel, or signature red
- Classic stainless steel exterior finish
- Bezels with stainless steel finish surround all knobs - chrome or brass bezels available as an accessory
- Dual-stacked sealed 9,200 Btu / hr (2.7 kWh) and 15,000 Btu/ hr (4.4 kWh) burners, all with simmer capabilities and automatic reignition at all settings
- Melt feature on one 9,200 Btu / hr (2.7 kWh) burner
- Porcelain coated cast iron continuous top grates
- Pivoting hidden touch control panel
- Cobalt blue porcelain oven interior
- Ten cooking modes—bake, roast, broil, convection bake, convection roast, convection broil, convection, bake stone (accessory required), dehydrate (accessory required) and proof
- Self-cleaning oven
- Coaxial temperature displaying oven selector knob
- Temperature probe feature
- Hidden bake element and recessed broil element
- Spring/damper door system for each oven door
- Three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard.





DUAL FUEL RANGE - 4 BURNERS W.760

ICBDF304

PLANNING INFORMATION

- When installing against a combustibile surface, a minimum 254 mm riser is required for a 91 cm dual fuel range with charbroiler or griddle and all 122 cm and 152 cm models. Follow all minimum clearances to combustibile surfaces shown in the illustration on the following page.
- A Wolf pro ventilation hood is recommended with the dual fuel range. Refer to page 89 for Pro Ventilation.

ELECTRICAL

- Installation must comply with all applicable electrical codes and be properly grounded (earthed).
- Locate the electrical supply push with the wall or door and within the shaded area shown in the illustration on the following page. A separate circuit, servicing only this appliance is required.
- Wolf dual fuel ranges have a terminal block that allows for a 3-wire or 4-wire installation.
- Performance may be compromised if the electrical supply is less than 220 volts.
- The range is supplied with a single phase and 3-phase convertible power inlet box. The wiring diagram covering the control circuit is provided with the oven.

REQUIRED POWER SUPPLY

Single Phase grounded, 220-240 VAC; 50/60 Hz
3phase 380-415V AC, 50 Hz

MAXIMUM CONNECTED LOAD

DUAL FUEL RANGES	SINGLE PHASE	3PHASE
762 mm and 914 mm	19 amps	18 amps
1219 mm	35 amps	18 amps
1524 mm	38 amps	18 amps

GAS SUPPLY

- Installation must conform with all applicable gas codes.
- A gas supply line of 19 mm rigid pipe must be provided to the range. If local codes permit, a certified, .9 m long, 13 mm, or 19 mm ID flexible metal appliance connector is recommended to connect the units ISO 7/1-14 female inlet to the gas supply line.
- Wolf natural gas ranges will function up to 3124 m in altitude without adjustment and LP gas ranges will function up to 2621 m. If the installation exceeds these elevations, contact an authorized Wolf dealer for a high altitude conversion kit.



GAS REQUIRMENTS

NATURAL GAS	WC
Supply Pressure	25 mbar
LP GAS	WC
Supply Pressure	37 mbar



DUAL FUEL RANGE - 4 BURNERS W.760

ICBDF304

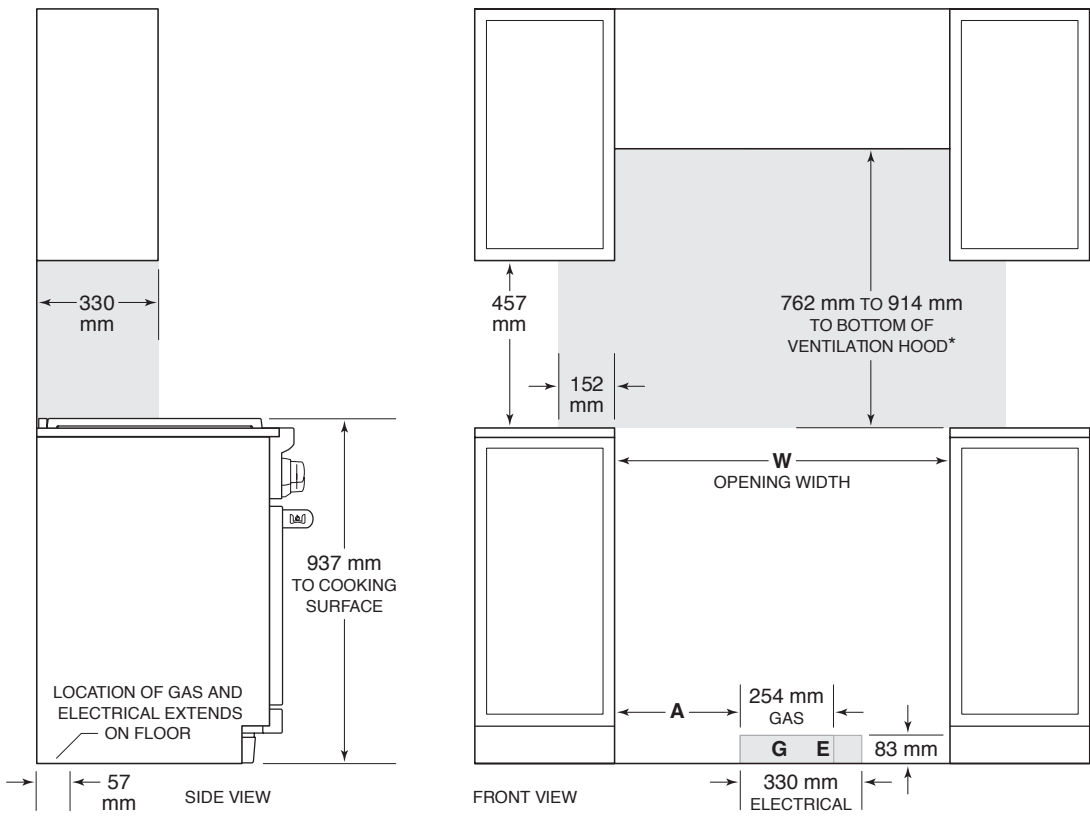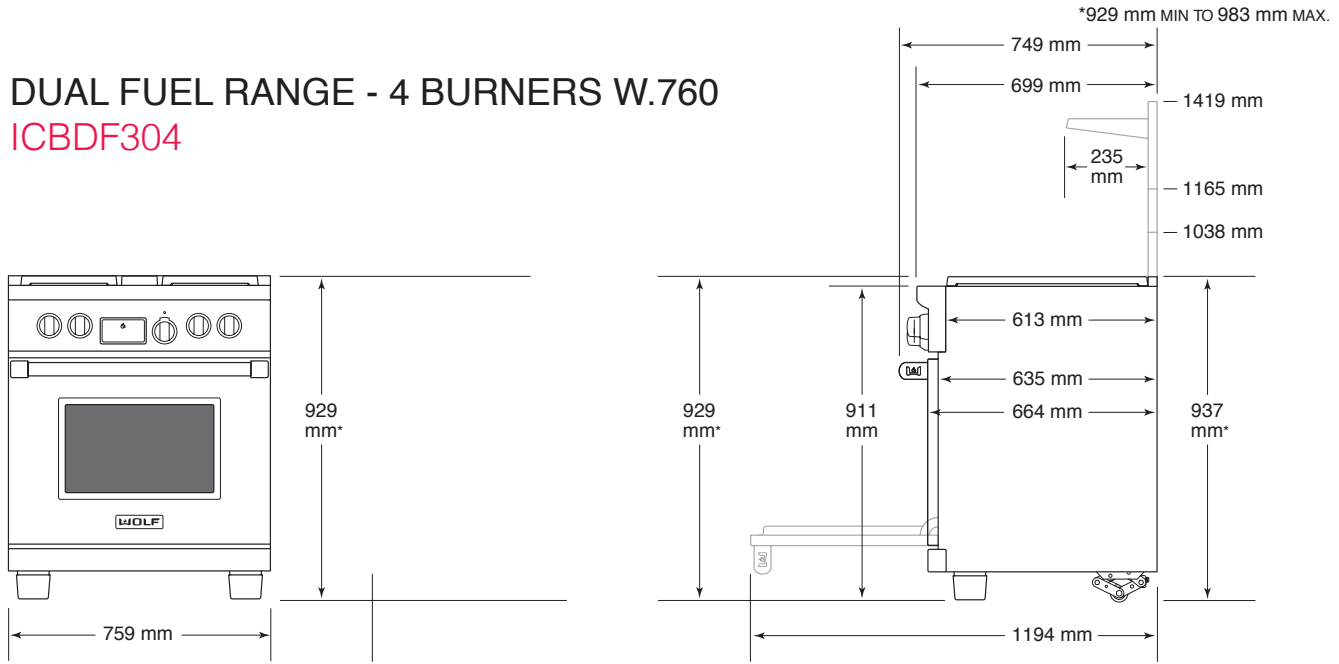

*Without ventilation hood, 914 mm minimum clearance countertop to combustible materials, 118 mm for charbroiler.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 305 mm minimum clearance back of range to combustible rear wall above countertop .

CUTOUT WIDTH

76 cm Model
91 cm Model
122 cm Model
152 cm Model

W

762 mm
914 mm
1219 mm
1530 mm

A

216 mm
343 mm
610 mm
787 mm