


E SERIES OVENS

E Series Built-In Ovens

Stainless models feature a redesigned stainless steel touch-action control panel, helping to create great meals with ease, as well as adding a striking design feature to the kitchen. Smart technology gives the E series ten cooking modes, with Wolf's innovative dual convection in single ovens and in the upper unit of double ovens. Wolf E series ovens are crafted of stainless steel. Tubular handles have been updated to match the rest of the new Wolf cooking appliance offering, providing a more cohesive look. E series ovens can be installed in a standard or flush inset application.

E SERIES OVENS


TRANSITIONAL




ICBSO2418TE/S/TH



ICBSO24TE/S/TH




ICBSO30TE/S/TH



ICBDO30TE/S/TH

PROFESSIONAL




ICBSO30PE/S/PH



ICBDO30PE/S/PH

CONTEMPORARY



ICBSO30CE/B/TH




ICBDO30CE/B/TH


E SERIES OVENS

60 cm E Series Ovens

MODEL ICBSO2418TE/S/TH TRANSITIONAL SINGLE OVEN

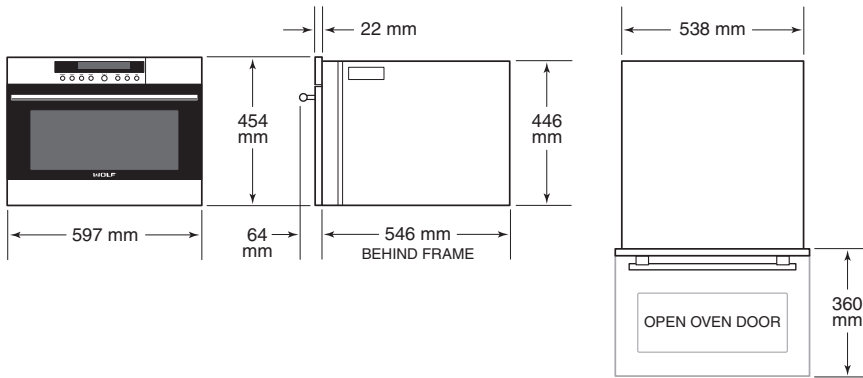


MODEL ICBSO24TE/S/TH TRANSITIONAL SINGLE OVEN

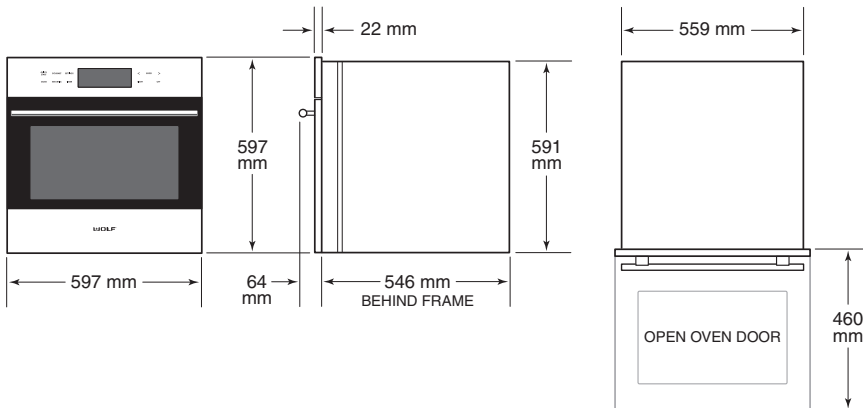


E SERIES OVENS

76 cm E Series Ovens

TRANSITIONAL SINGLE OVEN

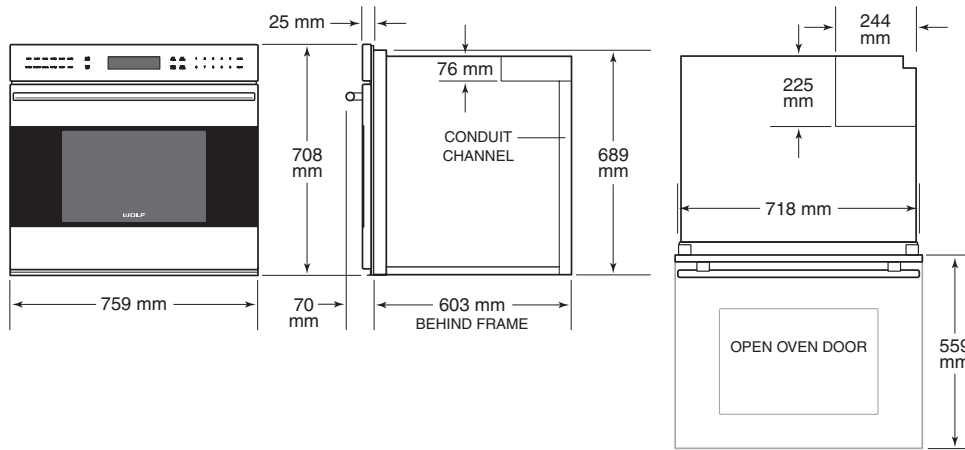


TRANSITIONAL DOUBLE OVEN

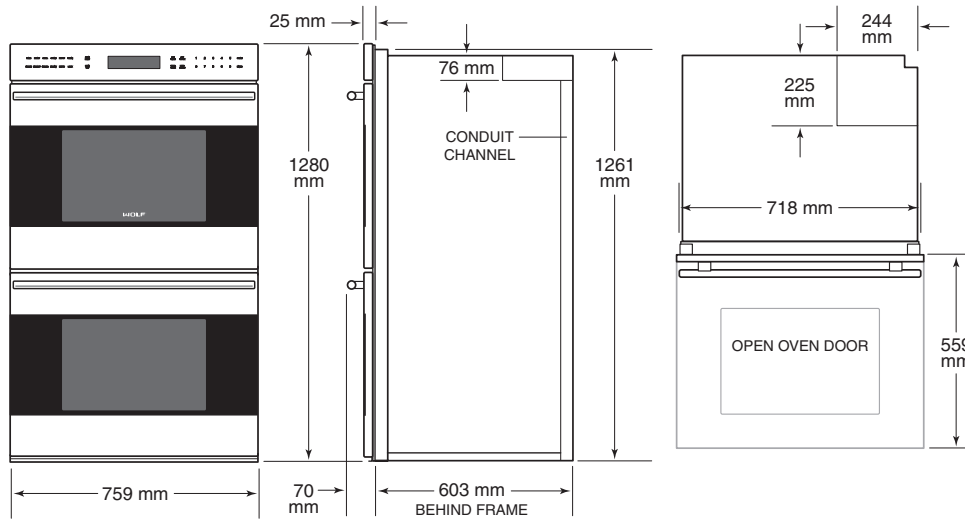


E SERIES OVENS

76 cm E Series Ovens

PROFESSIONAL SINGLE OVEN

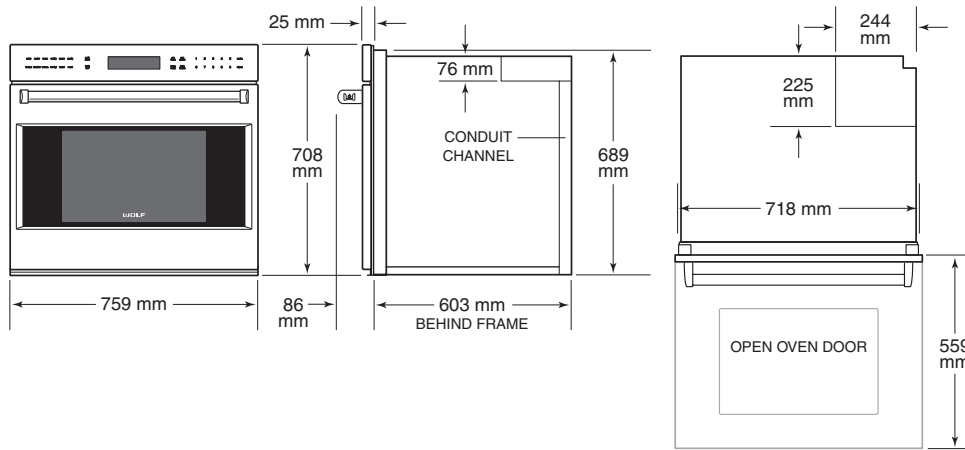


PROFESSIONAL DOUBLE OVEN

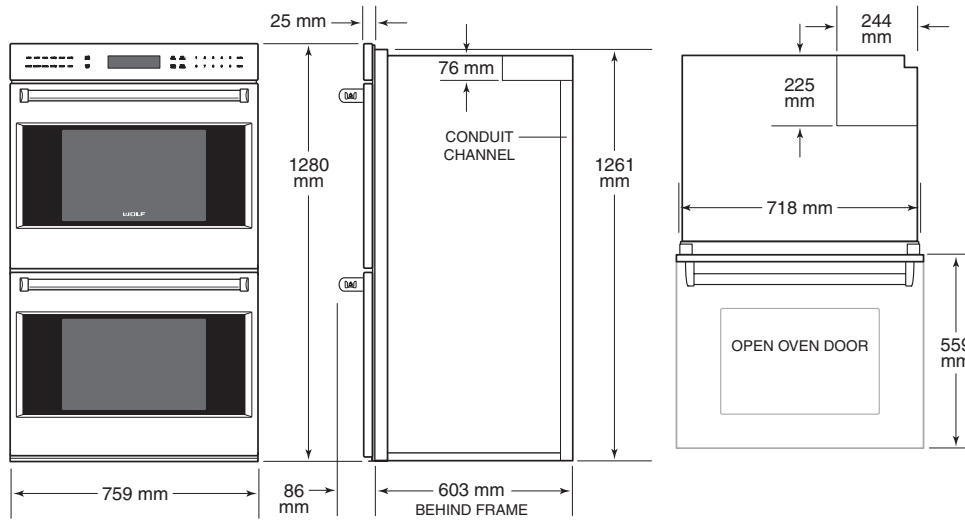


E SERIES OVENS

76 cm E Series Ovens

CONTEMPORARY SINGLE OVEN

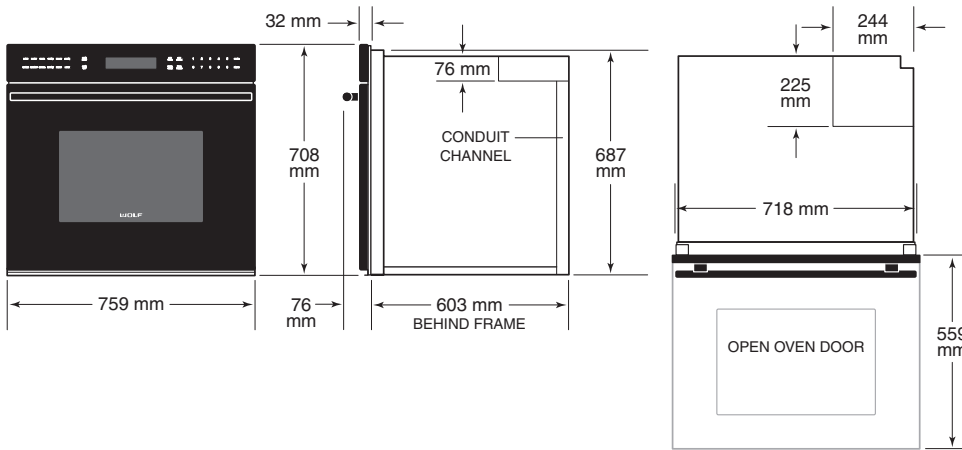

CONTEMPORARY DOUBLE OVEN

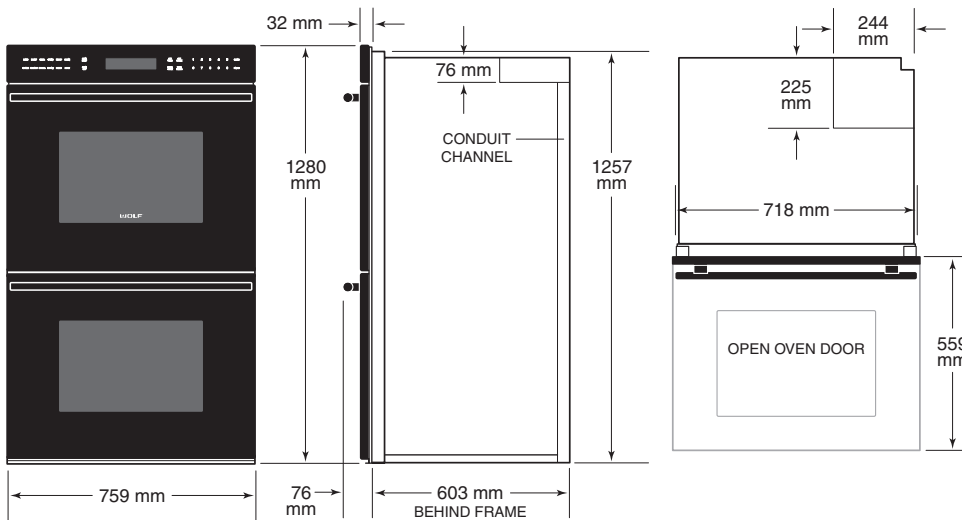

E SERIES OVENS

Planning Information

The E series oven can be installed in a standard or flush inset application. If a cooktop is installed above an oven, a minimum of 6 mm is required between the units. Location of the electrical supply within the oven opening may require additional cabinet depth.

Finish the edges of the opening. They may be visible when the door is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 6 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
60 cm Single Oven		68 kg
76 cm Single Oven		115 kg
76 cm Double Oven		181 kg
TRIM OVERLAP	60 cm MODEL	76 cm MODEL
Top	6 mm	13 mm
Bottom	0 mm	3 mm
Sides	17 mm	17 mm

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply flush with the back wall and within the shaded area shown in the illustration for your specific installation on the following pages. For ease of installation, the electrical supply for the oven can be placed in an adjacent cabinet. The 76 cm ovens are supplied with a terminal box convertible to single or 3-phase.

The wiring diagram covering the control circuit is provided with the oven.

ELECTRICAL REQUIREMENTS

60 cm SINGLE OVEN	
Electrical Supply	220-240 V AC, 50 Hz
Service	3400 W
Receptacle	grounding-type (earthed)
Power Cord	1.8 m


ELECTRICAL REQUIREMENTS

76 cm SINGLE OVEN	SINGLE PHASE	3-PHASE
Required Power Supply	220-240 V AC 50/60 Hz	380-415 V AC 50 Hz
Max Connected Load	4.4 kW	4.4 kW
Total Amps	19	19
76 cm DOUBLE OVEN	SINGLE PHASE	3-PHASE
Required Power Supply	220-240 V AC 50/60 Hz	380-415 V AC 50 Hz
Max Connected Load	7.4 kW	5.1 kW
Total Amps	32	22


E SERIES OVENS

60 cm E Series Oven


STANDARD INSTALLATION

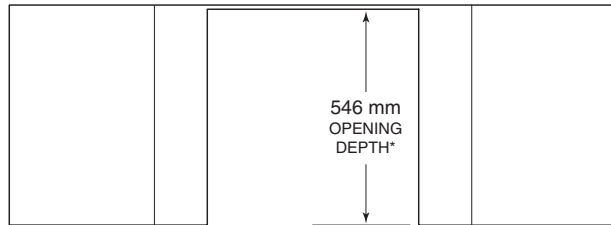

TOP VIEW

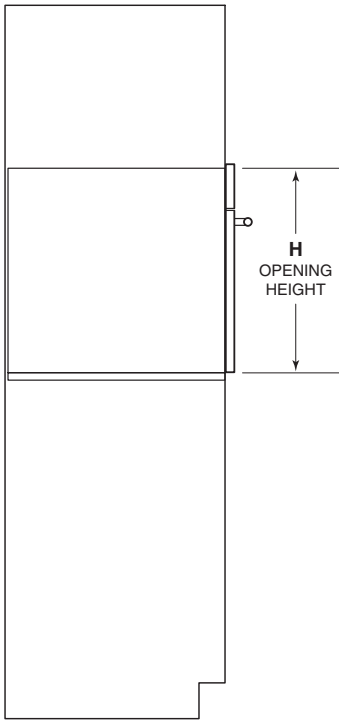

SIDE VIEW

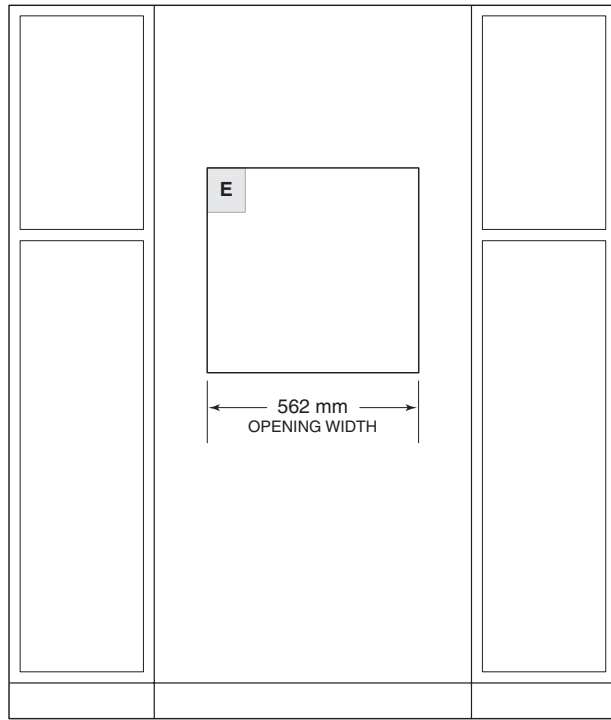

FRONT VIEW


**Does not include additional depth for the electrical connection.*

OPENING HEIGHT	H
ICBSO2418TE/S/TH	449 mm
ICBSO24TE/S/TH	591 mm


E SERIES OVENS

76 cm E Series Single Oven


STANDARD INSTALLATION

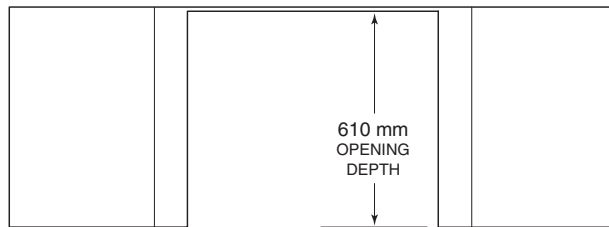

TOP VIEW

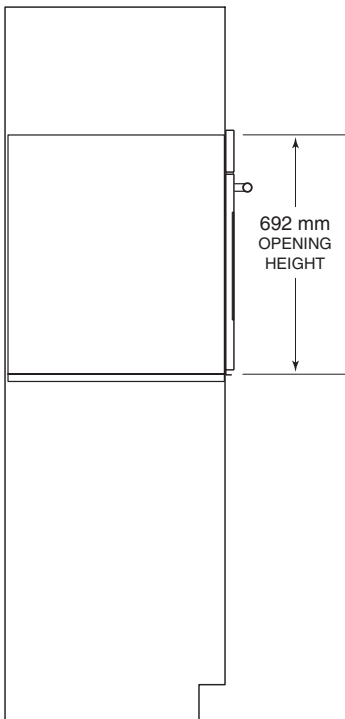

SIDE VIEW

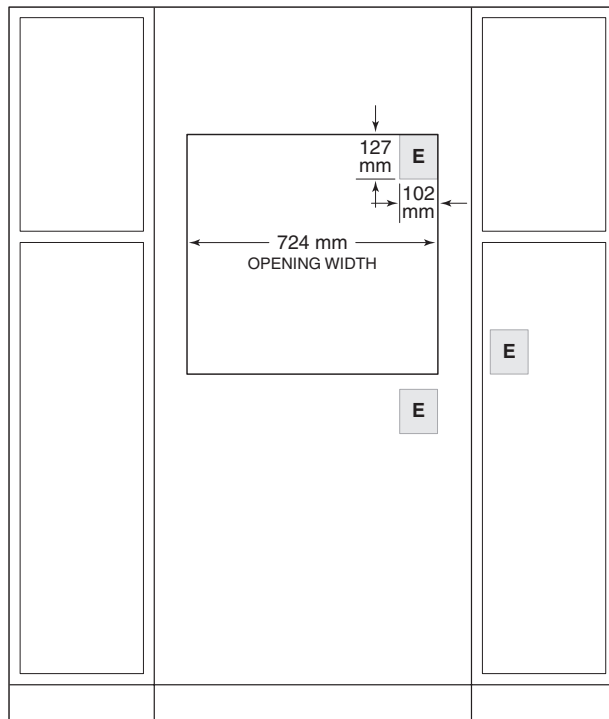



FRONT VIEW

NOTE: Location of electrical supply within opening may require additional cabinet depth.


E SERIES OVENS

76 cm E Series Single Oven

FLUSH INSET INSTALLATION

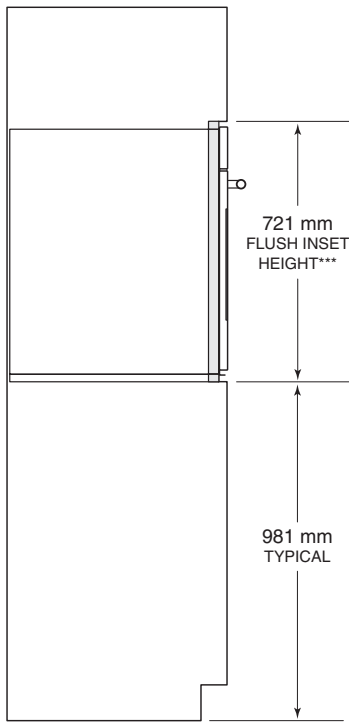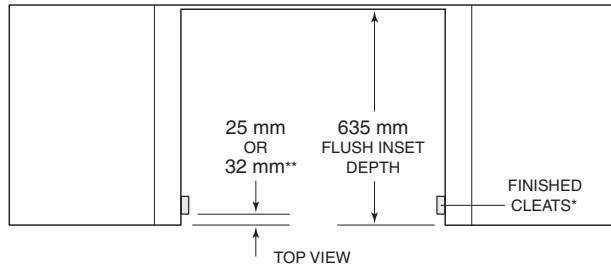

SIDE VIEW

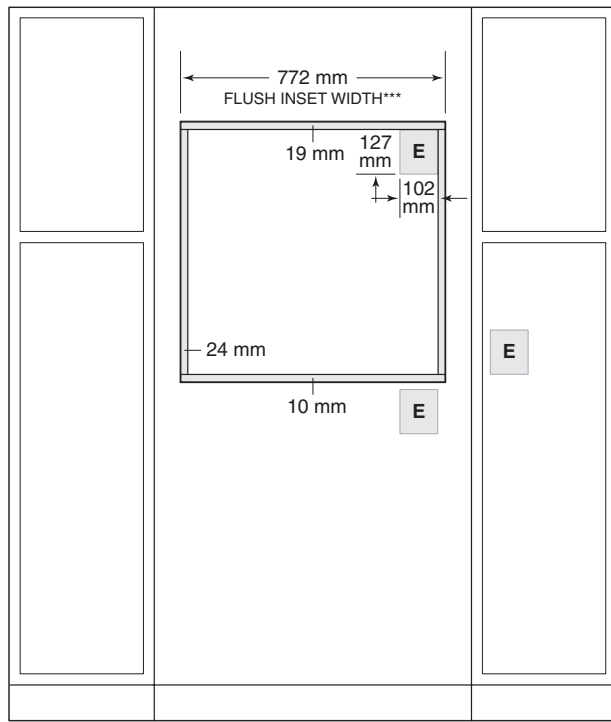

FRONT VIEW

*Will be visible and should be finished to match cabinetry.

**25 mm for professional and transitional models and 32 mm for contemporary model.


***Dimension provides minimum reveals.

NOTE: Location of electrical supply within opening may require additional cabinet depth.


E SERIES OVENS

76 cm E Series Double Oven


STANDARD INSTALLATION

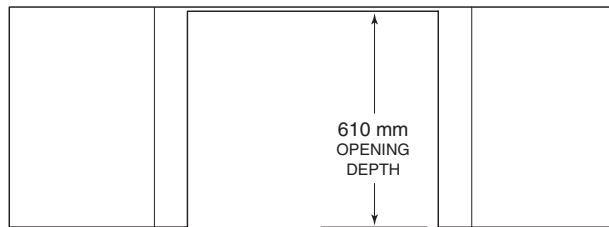

TOP VIEW

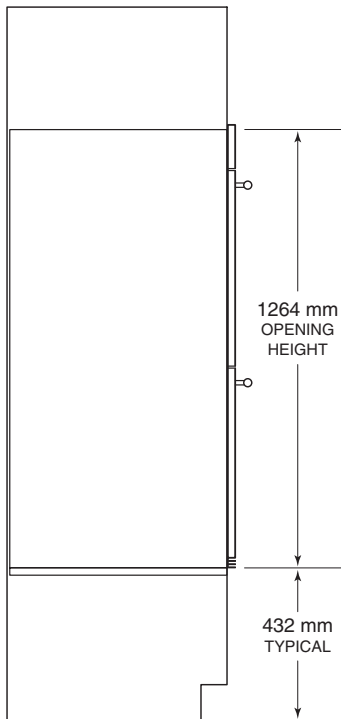

SIDE VIEW

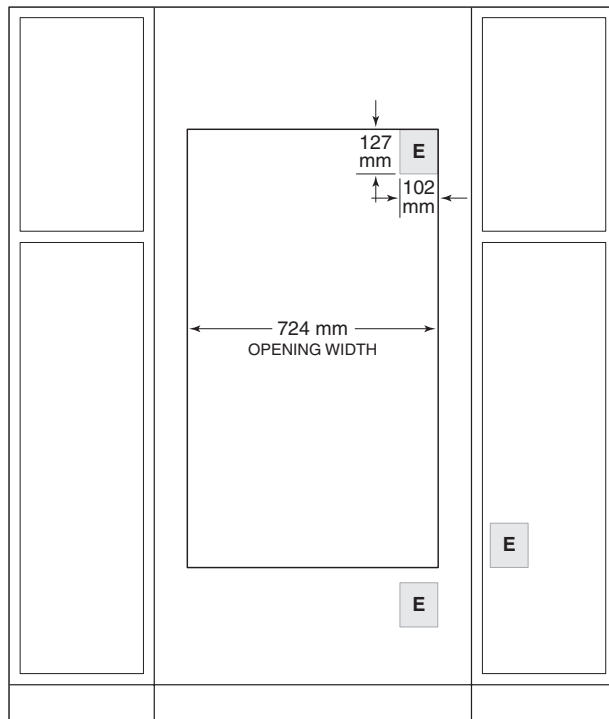

FRONT VIEW

NOTE: Location of electrical supply within opening may require additional cabinet depth.

