



TRANSITIONAL TEPPANYAKI MODULE W.381 ICBTM15TF/S

- Integrated design, slim 15" width pairs well with other Wolf modules
- Fast preheat and temperature response
- Flexible cooking surface – bridge between two zones
- Easy to clean stainless steel surface
- Illuminated touch controls and convenient lock feature

SPECIFICATIONS

Key Features:

- Integrated design, slim 15" width pairs well with other Wolf modules
- Fast preheat and temperature response
- Flexible cooking surface – bridge between two zones
- Easy to clean stainless steel surface
- Illuminated touch controls and convenient lock feature
- Two 1400-watt induction heating zones – front and back – enable you to stir fry or saute in one zone while keeping other items at serving temperature in the other zone. Or bridge the zones to cook at the same temperature over the entire surface.
- Illuminated white LED sliding touch controls are crisp and easy to read. Control panel lock prevents unwanted use of cooktop.
- Preheats quickly and while cooking provides almost instantaneous temperature response.
- The stainless steel surface is easier to clean than a traditional griddle.



TRANSITIONAL TEPPANYAKI MODULE W.381 ICBTM15TF/S

PLANNING INFORMATION

- IMPORTANT NOTE: Wolf does not recommend the use of downdraft ventilation with the steamer or grill modules.
- A minimum 51 mm is required from the bottom of the module to combustible materials. For the teppanyaki module, a minimum 22 mm is required from the bottom of the unit to any material.
- Refer to illustrations on the following pages for installation of modules.
- When multiple modules are installed side by side, refer to the chart and illustration below for typical configurations. The cutout dimensions provided will accommodate the use of an optional filler strip if desired.


ELECTRICAL

- Installation must comply with all applicable electrical codes and be properly grounded (earthed).
- Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit, servicing only this appliance is required.
- The induction cooktop is supplied with a single phase and 3-phase convertible power inlet box.
- When multiple cooktops or modules are installed side by side, each must have its own separate electrical supply.

COUNTERTOP CUTOUT W*

(2) 38 cm Modules	737 mm
(3) 38 cm Modules	1118 mm
(4) 38 cm Modules	1505 mm
(5) 38 cm Modules	1886 mm
(6) 38 cm Modules	2267 mm

***Dimensions apply to ICBCI152TF/S, ICBCE152TF/S, ICBCG152TF/S, ICBSM15TF/S, ICBG-M15TF/S, ICBTM15TF/S and ICBMM15TF/S.**

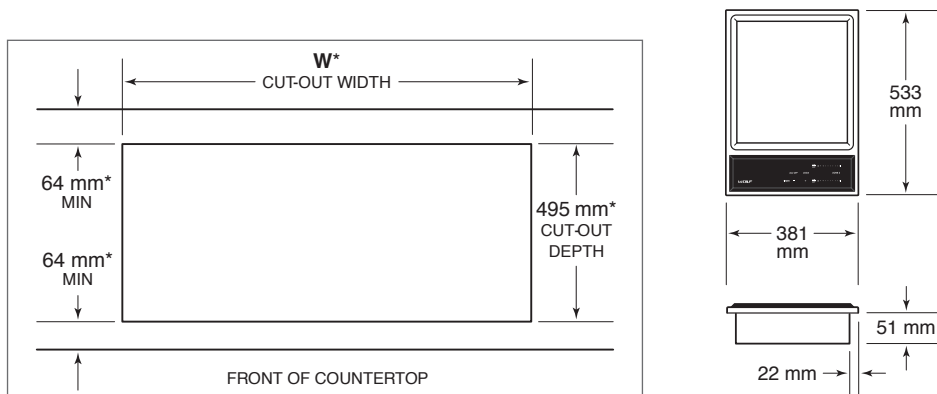



TRANSITIONAL TEPPANYAKI MODULE W.381

ICBTM15TF/S

GAS SUPPLY

- Installation must conform with all applicable gas codes.
- For gas modules, a gas supply line of 19 mm rigid pipe must be provided to the module. If local codes permit, a certified, .9 m long, 13 mm, or 19 mm ID flexible metal appliance connector is recommended to connect the units ISO 7/1-14 male inlet to the gas supply line.
- When multiple gas cooktops or modules are installed side by side, they can receive their gas supply from a common line. However, each unit must have its own regulator installed between the mainline and the cooktop or module.
- Wolf natural gas cooktops will function up to 3124 m in altitude without adjustment and LP gas cooktops will function up to 2621 m. If the installation exceeds these elevations, contact an authorized Wolf dealer for a high altitude conversion kit.

DRAIN OUTLET

The steamer module requires a method for draining hot water. Options include connecting a drain hose from the 16 mm outlet tied into an existing drain, a separate drain with freefall, or placing a heat-resistant receptacle under the drain outlet.

INDUCTION MODULE

TOTAL AMPS

16

SINGLE PHASE

220-240 VAC
50/60 Hz

3-PHASE

380-415 V AC
50 Hz

ELECTRIC MODULES

STEAMER/ TEPPANYAKI

2700 W

ELECTRICAL SUPPLY

220-240 VAC
50/60 Hz

GRILL

2800 W

GAS MODULES

Required Power Supply
Service
Receptacle
Power cord

220-240 V AC; 50/60 Hz
0.2 A
3 prong grounding-type
1.8 m

GAS REQUIRMENTS

NATURAL GAS

Supply Pressure

WC

25 mbar


LP GAS

Supply Pressure


WC

37 mbar


TRANSITIONAL TEPPANYAKI MODULE W.381 ICBTM15TF/S STANDARD INSTALLATION

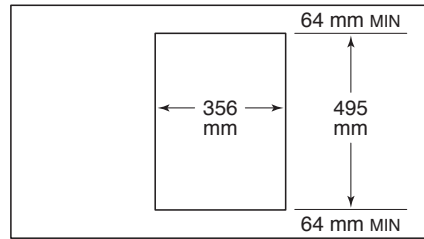

COUNTERTOP CUT-OUT

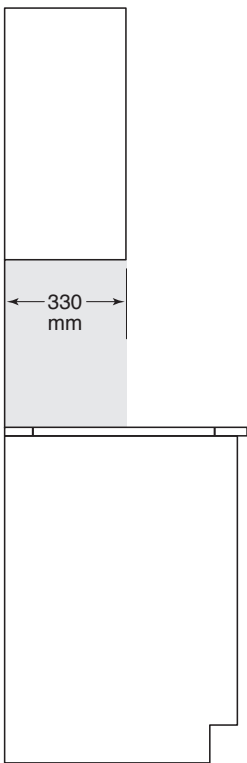

SIDE VIEW

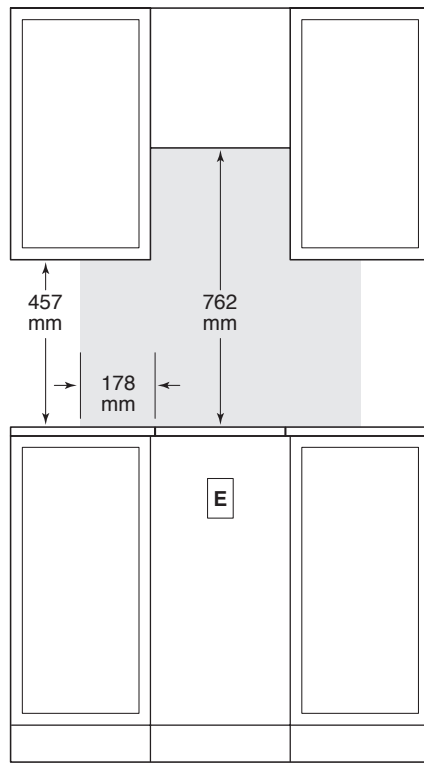

FRONT VIEW

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.