

KFN 28032 D edt/cs

Freestanding fridge-freezer

with Frost free and Dynamic cooling for highest convenience and versatility.



- Optimum and maintenance-free LED lighting in compartment
- High efficiency and top-class freshness
- No icing up of food and no need to defrost thanks to Frost free
- Handle-less design thanks to an integrated handle design

Appliance category	
Fridge-freezer	•
Construction type	
Freestanding appliance	•
Door hinge	right
Convertible door hinging	•
Design	
Casing colour	Stainless steel CleanSteel
Front colour	Stainless steel/CleanSteel
Refrigeration section lighting	LED
User convenience	
ComfortClean	•
DynaCool	•
NoFrost	•
DuplexCool	•
VarioRoom	•
Concealed door opener	Integrated handle
Controls	
Operating concept	FreshTouch
Fridge compartment can be switched off	•
Automatic SuperCool	•
SuperFreeze	•
No. of temperature zones	2
Sabbath mode	•
Party mode	•
Holiday mode	•
QuickCool Timer	•
Fridge/Fridge section	
Height-adjustable tempered glass shelves	•
No. of shelves	3
Chrome-plated metal bottle rack	•
No. of vegetable drawers	Qty 2
of which on castors	2
Number of door shelves for jars	2
Door rack for bottles	2
Freezer/Freezer section	
Number of freezer drawers/baskets	Qty 3
Safety	
Lock function	•
Acoustic door alarm	•
Acoustic temperature alarm, freezer section	•
Optical door alarm	•
Optical temperature alarm	•
Power cut indication for freezer section	•

KFN 28032 D edt/cs

Freestanding fridge-freezer

with Frost free and Dynamic cooling for highest convenience and versatility.




Technical data	
Appliance width in mm	600
Appliance height in mm	1,817
Appliance depth in mm	625
Climate class	SN-T
Refrigerator compartment in l	221
4* freezer compartment in l	95
Storage time in case of fault	18
Freezer capacity in kg/24 h	11.0
Current consumption (mA)	1,400
Voltage in V	220-240
Fuse rating in A	10
Length of supply lead in m	2.4
Standard accessories	
Ice cube tray	•

KFN 28032 D edt/cs

Freestanding fridge-freezer

with Frost free and Dynamic cooling for highest convenience and versatility.

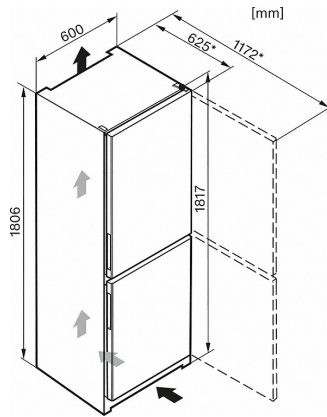

KF28033D, KF28032, KFN28032, KFN28032D edt/cs,
KD28032, (installation drawings) (*footnote)

*To ensure that energy consumption as stated is achieved, machines should be used together with the enclosed spacer brackets. This increases the total depth of the unit by approx. 3.5 cm. Machines are still fully functional when operated without these brackets but have a slightly higher energy consumption.