

DA 7198 W Triple Black

Wall mounted rangehood

with energy-efficient LED lighting and light-touch switches for easy use.



- Unique design with 3 curved glass surfaces, 880mm wide
- Unique user convenience – Con@ctivity
- Energy-efficient and uniform illumination – 2 LED spotlights
- Powerful – 700m³/h on the booster setting
- Energy-efficient and quiet – powerful ECO motor

Construction type	
Wall mounted cooker hood	•
Design	
Colour	Obsidian black
Operating modes	
Type of air guide	Convertible
Active charcoal filter (order separately)	DKF11-1
User convenience	
Networking with Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Light-touch controls	•
Miele@mobile app	•
Power levels (number without Booster level)	3
Booster level	•
Programmable Booster level switch-off	•
Run-on time 5 / 15 min.	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Efficiency and sustainability	
ECO package	•
Filter system	
Number of dishwasher safe stainless steel grease filters	1
Lighting	
LED	•
Light intensity in Lx	600
Colour temperature in K	3,500
Dimmer function	•
Fan	
Dual-action fan	•
ECO motor (DC motor)	•

DA 7198 W Triple Black

Wall mounted rangehood

with energy-efficient LED lighting and light-touch switches for easy use.



Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m ³ /h)	270
Air throughput in Level 2 (m ³ /h)	410
Air throughput in Level 3 (m ³ /h)	540
Air throughput in Booster level (m ³ /h)	700
Sound power in Level 1 (dB(A) re 1 pW)	51
Sound power in Level 2 (dB(A) re 1 pW)	61
Sound power in Level 3 (dB(A) re 1 pW)	69
Sound power in Booster level (dB(A) re 1 pW)	74
Sound pressure in Level 1 (dB(A) re 20 µPa)	36
Sound pressure in Level 2 (dB(A) re 20 µPa)	47
Sound pressure in Level 3 (dB(A) re 20 µPa)	54
Sound pressure in Booster level (dB(A) re 20 µPa)	60
Air throughput in recirculation mode	
Air throughput in Level 1 (m ³ /h)	175
Air throughput in Level 2 (m ³ /h)	285
Air throughput in Level 3 (m ³ /h)	330
Air throughput in Booster level (m ³ /h)	380
Sound power in Level 1 (dB(A) re 1 pW)	57
Sound power in Level 2 (dB(A) re 1 pW)	68
Sound power in Level 3 (dB(A) re 1 pW)	71
Sound power in Booster level (dB(A) re 1 pW)	74
Sound pressure in Level 1 (dB(A) re 20 µPa)	42
Sound pressure in Level 2 (dB(A) re 20 µPa)	53
Sound pressure in Level 3 (dB(A) re 20 µPa)	56
Sound power in Booster level (dB(A) re 1 pW)	60
Safety	
Safety switch-off	•
Single pane tempered glass	•
Technical data	
Overall height for extraction mode and external mode cooker hoods in mm	440
Overall height for recirculation mode cooker hoods in mm	440
Canopy width in mm	880
Canopy height in mm	440
Canopy depth in mm	433
Net weight in kg	21.0
Length of supply lead in m	1.5
Standard plug fitted	•
Hard-wired connection	•
Total rated load in kW	0.24
Voltage in V	230
Fuse rating in A	10
Number of phases	1

DA 7198 W Triple Black

Wall mounted rangehood

with energy-efficient LED lighting and light-touch switches for easy use.




Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of extraction ducting connection in mm	150
Combination with WiFi-enabled Miele hob	recommended
Standard accessories	
Non-return flap	•
RF Con@ctivity 2.0 communication stick for KM	XKS 3000 Z

DA 7198 W Triple Black

Wall mounted rangehood

with energy-efficient LED lighting and light-touch switches for easy use.

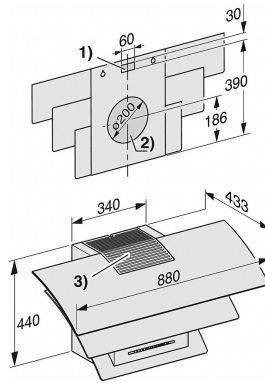

DA 7198 W - Triple (installation drawing)

- 1) Breakthrough, if the mains connection is not with mains plug but with fixed connection.
- 2) Breakthrough in air exhaust to the rear. Exhaust connection alternatively to the rear.
- 3) Air outlet for recirculation. The distance to the ceiling or the top of the unit mounted furniture should be at least 300 mm.