

## PRO SURFACE INDUCTION GLASS-CERAMIC COOKTOP WITH 2 COOKING ZONES


### PKFI11

- Warming function & power setting
- Bridging function & residual heat display
- Pause function
- Timer function & Configuration menu
- Rotation by 180° possible during installation
- Cooking zone indicator on the control knob
- Demo mode
- Pan size recognition
- Automatic heat up function
- Digital power display on the control knob
- Childproofing feature
- Safety shut-down

## SPECIFICATIONS

---

- Supply voltage 220 – 240 V
- Frequency 50/60 Hz
- Maximum power consumption 3.7 kW
- Maximum power rating 3.7 kW
- Minimum fuse protection 1 x 16 A
- Power levels 1 – 9, P
- Weight (incl. accessories/packaging) 8.1 kg
- Power supply cable 1.5 m (L, N, PE)
- Dimensions (WxDxH) 370 x 540 x 52 mm
- Front cooking zone dimensions 230 x 230 mm
- Front cooking zone power 2100 W
- Front cooking zone power setting 3700 W
- Back cooking zone dimensions 230 x 230 mm
- Back cooking zone power 2100 W
- Back cooking zone power setting 3700 W
- Material Oberfläche SCHOTT CERAN®
- Please note that induction- compatible cookware must be used on induction cooktops
- Make sure that the area below the induction cooktop is sufficiently ventilated

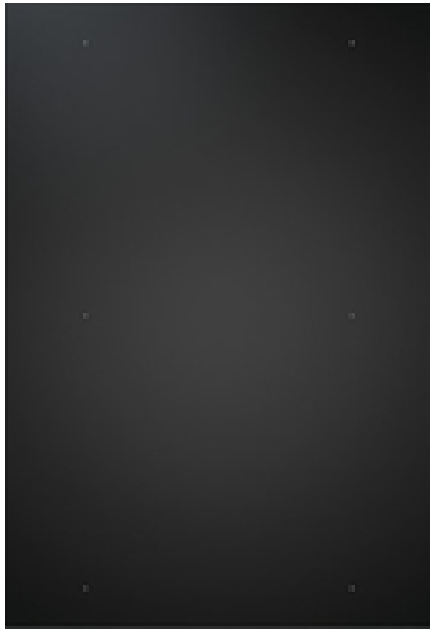

## PRO SURFACE INDUCTION GLASS-CERAMIC COOKTOP WITH 2 COOKING ZONES

**PKFI11**

### SCOPE OF DELIVERY

- PKFI11 induction glass ceramic cooktop
- 2 x control knobs
- 2 x connection cables for the control knobs
- Connection cable to the extractor
- Operating and installation instructions
- Mounting straps
- Glass ceramic scraper
- Drilling template
- Height adjustment plate set

## SPECIFICATIONS

