



#### Color Variants

RC462504

#### Included accessories

1 x egg box with lid.

#### Optional accessories

RA430100

Storage container with transparent lid, anthracite.

#### Installation Accessories

RA421610

Stainless steel door panel with handle

RA423140

RA425110

Long stainless steel door handle

RA428610

RA460000

Installation kit for side-by-side installation (for connecting any two columns)

RA460013

RA460020

Connecting element for vertically split appliance fronts (for a flush front)

RA464611

Ventilation grill, stainless steel

#### Product Features

##### Construction type

Built-in

##### Number of compressors

1

##### Number of independent cooling systems

1

##### Width of the product (mm)

603

##### Height (mm)

2125

##### Depth of the product

608

##### Net weight (kg)

151.067

##### Required cutout size (HxWxD) (mm)

2134.0 x 610 x 610

##### Panel ready

Not possible

##### Door Hinge

Right reversible

##### Adjustable Shelves - Refrigerator

3

##### Shelves for Bottles

No

##### Frost free system

Fridge and freezer

##### Interior ventilator

No

##### Reversible Door Hinge

Yes

##### Power cord length (cm)

300

##### Silence level (dBA)

38

##### Multi-Flow Air Tower

Yes

##### SUPERCOOL

Yes

##### SUPERFREEZE

No

##### Carbon Air Filter

No

##### Temperature Controlled Drawer

No

##### Humidity Control Drawer

No

##### Number of Door Bins - Refrigerator

4

##### Adjustable Door Bins - Refrigerator

No

##### Tilt-Out Door Bins - Refrigerator

No

##### Gallon Storage Bins

1

##### No. of shelves in fridge

4

##### Number of Shelves - Freezer

##### Adjustable Shelves - Freezer

No

##### Capacity of Water Tank [l]

#### Consumption and connection features

##### Watts (W)

300

##### Current (A)

10

##### Volts (V)

220-240

##### Frequency (Hz)

50-60

##### Energy consumption (kWh)

##### Freezing capacity (kg)

##### Storage Period in Event of Power Failure (h)

##### Approval certificates

CE, VDE

##### UPC code

##### Color / Material housing

##### Panel ready

Not possible

##### Silence level (dBA)

38

##### Total annual energy consumption (kWh)

##### Energy Star® qualified

No


##### Power Cord Length

118"


##### Required cutout size (HxWxD) (in)

x x

# GAGGENAU

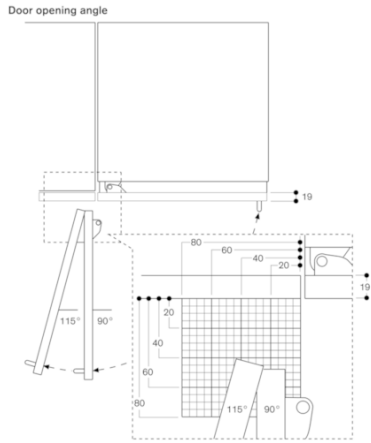


The hinge path and the resulting distances to the neighboring furniture and furniture handles can be taken from the drawing depending on the front thickness. In the drawing, a furniture front thickness of 19 mm is assumed.

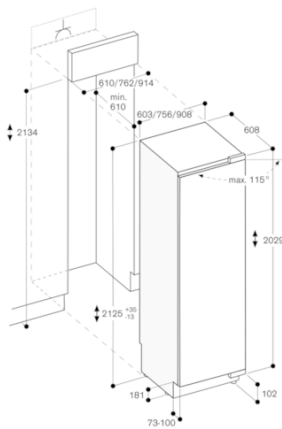


The maximum door front dimensions are designed for a clearance of 3 mm.

Base details

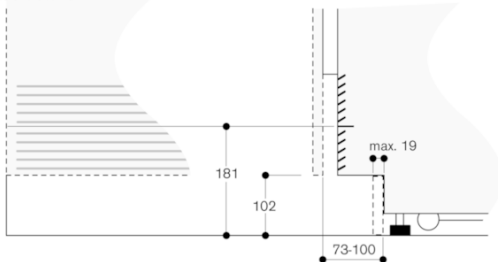

In relation to the standard height of the appliance, the height of the toe kick plate is 102 mm. Maximum thickness of the toe kick plate is 19 mm.

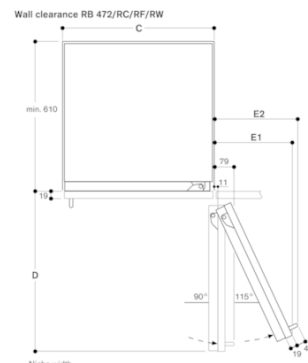

Niche width	C	D	E1	E2
457 mm	525 mm	235 mm	265 mm	
610 mm	677 mm	299 mm	330 mm	
762 mm	830 mm	364 mm	395 mm	
914 mm	980 mm	428 mm	460 mm	

The drawing is based on a furniture front thickness of 19 mm as well as the height of a Gaggenau furniture handle of 49 mm.

