



Color Variants

RW466305

Fully integrated, with solid door

Niche width 61 cm, Niche height 213.4 cm

RW466305

Vario wine climate cabinet 400 series

Fully integrated, with solid door

Niche width 61 cm, Niche height 213.4 cm



3 independently controllable climate zones
 Consistent temperatures with exact control from +5 °C to +20 °C
 Humidity control
 Stainless steel interior
 Fully extendable bottle trays in oak wood and solid aluminium in anthracite
 Bottle trays with hidden telescopic rails
 Warm white and glare-free LED light spots
 5 preset lighting scenarios, selectable via TFT display
 Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
 Low-vibration operation
 TFT touch display
 Capacity 99 bottles

Handling

TFT touch display operation.
 Clear text display.

Technical Features

Dynamic cold air distribution.
 Automatic defrosting with defrost water evaporation.
 Cushioned door closing system.
 Activated charcoal air filter.
 UV-protection.
 When rest mode is active, the appliance can only be opened using a handle.
 Open-door and malfunction alarm.
 Home network integration for digital services (Home Connect) wireless via WiFi.
 The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Features

Capacity 99 bottles (based on 0.75/l standard bottles).
 12 bottle trays,
 - 9 fully extendable trays
 - 3 suitable for storage of Magnum bottles.
 Flexible interior configuration possible by adding or removing fully extendable bottle trays.
 Storage of up to 12 Magnum bottles with standard tray configuration (12 bottle trays).
 Space for max. 12 bottle trays.
 2 brilliant LED light spots with warm white, glare-free light in each climate zone.
 5 different lighting scenarios can be selected for individual wine presentation.
 Noise level 42 dB (A) re 1 pW.

Planning notes

Flat hinge.
 Door hinge right, reversible.
 Door opening angle of 115°, fixable at 90°.
 Max. door panel weight 73 kg.
 The mains socket needs to be planned outside the built-in niche.

Connection

Total connected load 0.300 KW.
 Connecting cable 3.0 m, detachable.

Characteristics

Energy Efficiency Class (Regulation (EU) 2017/1369)

F

Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369

129

Capacity of 75 cl bottles (EU) 2017/1369

99

Airborne acoustical noise emissions (EU 2017/1369)

42

Airborne acoustical noise emission class (EU 2017/1369)

D

Built-in / Free-standing

Built-in

Door panel options

Not possible

Height

2125

Width of the appliance

603

Depth of the product

608

Required niche size for installation (HxWxD)

2134.0 x 610 x 610

Net weight

158.000

Connection Rating

300

Fuse protection

10

Interior ventilator

Yes

Voltage

220-240

Frequency

50-60

Approval certificates

CE, VDE

Length electrical supply cord

300

Plug type

Gardy plug w/ earthing

Number of compressors

1

Number of independent cooling systems

1

Reversible Door Hinge

Yes

Interior light switch

No

EAN code

4242006291013

Brand

Gaggenau

Product name / Commercial code

RW466305

Product category

Consumption and connection features

2021-10-02

Page 1

RW466305


Vario wine climate cabinet 400 series

Fully integrated, with solid door



Niche width 61 cm, Niche height 213.4 cm

2021-10-02


Page 2

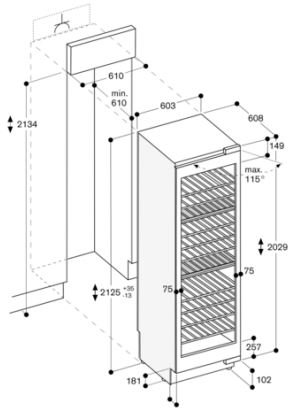

The maximum door panel dimensions are based on a clearance of 3 mm.

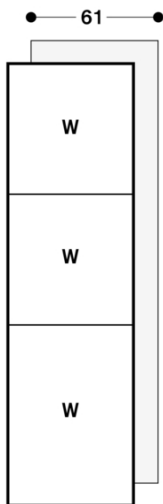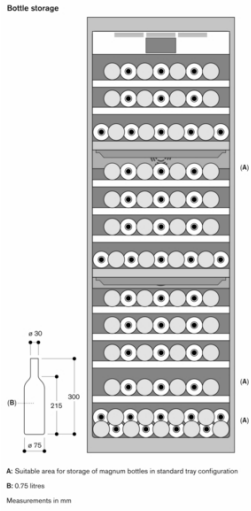


Wall clearance RB 472/RC/RF/RW



Recess width	C	D	E1	E2
457 mm	525 mm	235 mm	265 mm	
610 mm	677 mm	299 mm	330 mm	
762 mm	830 mm	364 mm	395 mm	
914 mm	980 mm	428 mm	460 mm	


In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

Door opening angle

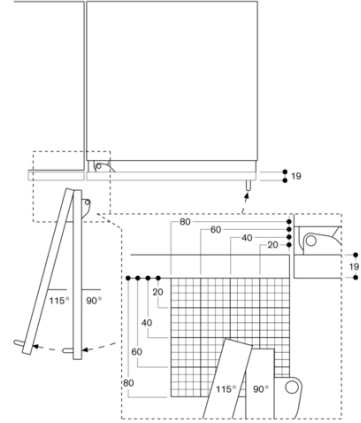

The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

Base detail

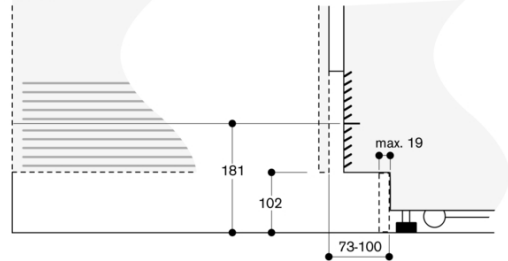

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.