

**STARLINE**



## PROFESSIONAL PREMIUM INSULATED UNDERCOUNTER DISHWASHER


UL

- Quikstart 1, 2 and 3 minute cycles
- Washes up to 1,080 plates / 1,500 glasses per hour
- QuikConnect Installation with everything you need including:
  - - Water supply hose
  - - Dual detergent and rinse aid pumps with injector lines
  - - Drain pump outlet hose
  - - 15 amp plugset (or easy 25Amp or 3P/15Amp connection for rapid recovery between cycles)
  - - No commissioning required

## SPECIFICATIONS

---

- Reliable results through robust stainless steel rinse arms with precision stainless jets
- Durable stainless steel construction
- Comprehensive 12 month Starline warranty
- Low hot water consumption of 2.4 litres per cycle
- Assured final rinse ensures the correct temperature and pressures every time through 316 stainless break tank and rinse pump
- Soft start ensures great wash results through progressively pressurising the cycle to provide a consistent and even clean every time
- EcoPower reduces temperatures and energy consumption when machine is not busy
- Full thermal and acoustic insulation (via dual stainless steel panelling) provide a cooler and quieter operating environment
- Enhanced filtration system that allows you to drain it straight from the keypad, with no need to put your hand in the machine
- Soft close door enables smoother and quieter operation of the machine
- Includes:
  - 1 x 600 70028 - 500mm dish rack
  - 1 x 600 70029 - 500mm cup rack
  - 1 x C660503 - cutlery container

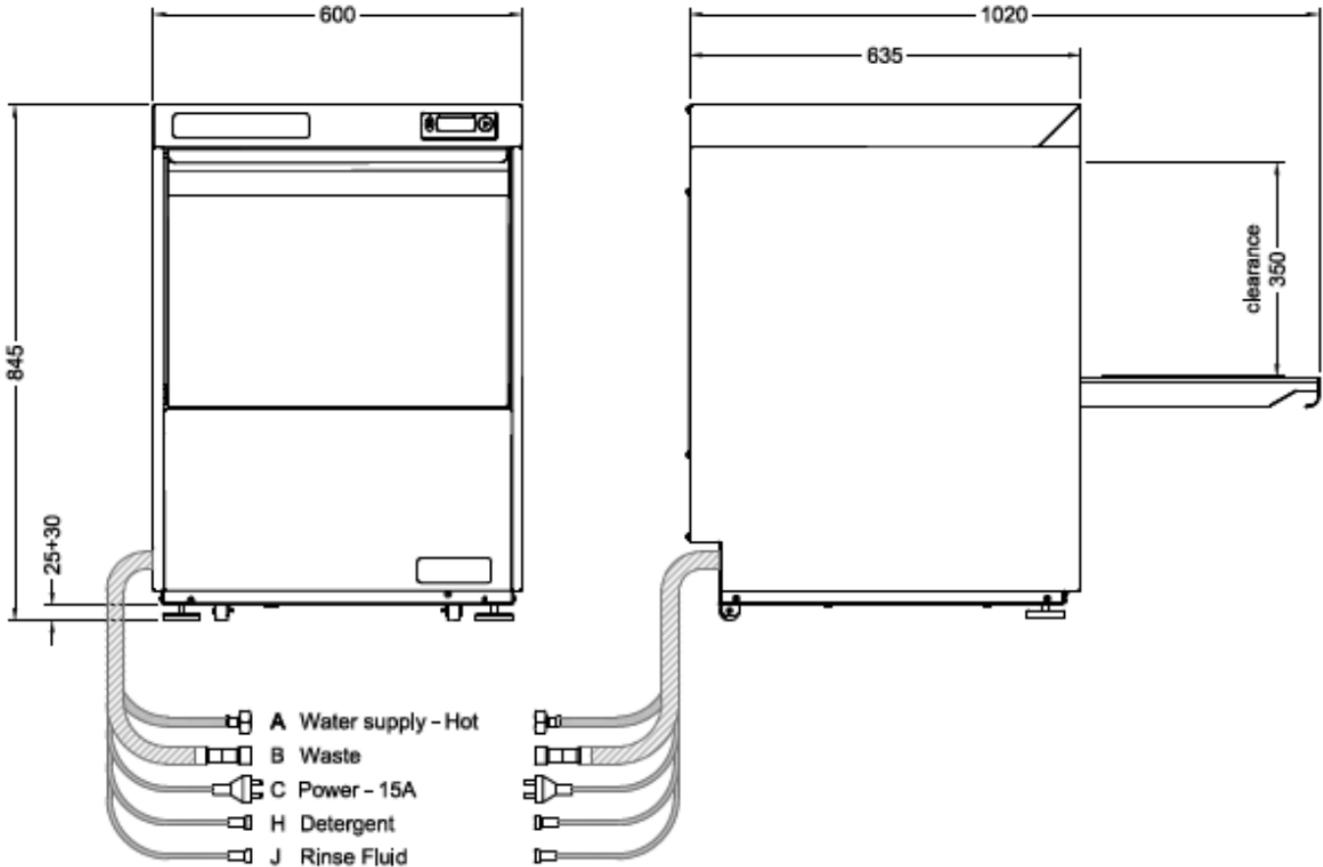

- A Hot water**  
 Temperature 65°C  
 Connection 3/4" male; hose supplied  
 Pressure 200-350kPa  
 Flow 15 litres per min  
 Quality Potable & soft  
 Backflow Prevention Atmospheric Vacuum Breaker  
 Consumption 2.4litres per cycle
- B Waste**  
 Connection Hose supplied for 38mm open standpipe 750 high or connection to sink trap
- C Electrical**  
 Single phase 230V 50Hz 15Amp (plugset supplied)  
 Single phase 230V 50Hz 25Amp  
 Three phase 400V 50Hz 15Amp per phase

**Nominal Power Consumption**

- 1P / 15A = 3.0kW rinse / 2.5kW wash / 3.37kW max  
 1P / 25A = 6.0kW rinse / 2.5kW wash / 6.37kW max  
 3P / 15A = 6.0kW rinse / 2.5kW wash / 9.00kW max

**Dimensions**

- Width 600mm  
 Depth 635mm  
 Height 845mm  
 Weight 74kg

**Packed Dimensions**

- Width 720mm  
 Depth 690mm  
 Height 970mm  
 Weight 92kg  
 Cubic metres 0.48m<sup>3</sup>

**Water Quality Requirements**

- | Hardness | ppm | pH |
|----------|-----|----|
| Min      | 20  | 7  |
| Max      | 100 | 8  |

- | Ions     | Cl <sup>-</sup> | SO <sub>4</sub> | Fe  | Mn  | Cu   | CL <sub>2</sub> |
|----------|-----------------|-----------------|-----|-----|------|-----------------|
| Max mg/l | 100             | 400             | 0.1 | 0.5 | 0.05 | 0.1             |
- Refer operator manual for installation instructions

Refer operator manual for installation instructions