



Color Variants

VL040115
Stainless steel control panel
Width 8.5 cm

Required installation accessories

AD724041
Round duct connection additional
adapter for VL414/VL040/VL041 on the
side
Metal zinc coated
AD724042
Connection piece for round pipe DN
150

Installation Accessories

LS041001
Ventilation moulding for VL 200 next to
gas appliance. Slots in between the gas
appliance and a downdraft ventilator.
Easily removeable when not in use.
Stainless steel
VV200014
Stainless steel connection strip
for combination with further Vario
cooktops

VL040115
Vario downdraft ventilation 200 series
Stainless steel control panel
Width 8.5 cm
Expansion element
Air extraction/air recirculation with
remote fan unit AR 403/413 121

Ventilation element integrated in the
worktop
Highly efficient ventilation system at the
cooktop
Minimal planning and easy installation
for air recirculation

Output

Power levels depend on the remote fan
unit.

Features

Ventilation grille, washable.
Metal grease filter with grease drip tray,
dishwasher-safe.
No duct connecting piece included.

Planning notes

Only in combination with VL 041 115.
Air extraction in combination with
remote fan unit AR 403 121 or air
recirculation mode with AR 413 121.
Ensure to have recommended
configurations of downdraft ventilations
and remote fan units and the needed
ducting elements.
Maximum cooktop width between 2 VL:
60 cm (exception: VI/VE 270).
If installed next to gas appliances,
the ventilation moulding LS 041 001
is recommended to ensure maximum
performance of the cooktop. If installed
next to gas appliances, flat ducts must
not be used for the piping up to the fan
unit.
When having installed the ventilation
moulding LS 041 001 the wok pan WP
400 001 can not be used.
When installing a ventilation hood with
air extraction mode and a chimney-
vented fireplace, the power supply line
of the ventilation appliance needs a
suitable safety switch.

Connection

Connecting cable 2.0 m with plug.

Characteristics

Product name/family
Color chimney
Typology
Approval certificates
Australia Standards, CE, Eurasian, G-
Mark, Ukraine, VDE
Length electrical supply cord (cm)
200
Required niche size for installation
(HxWxD)
320mm x 78.0mm x 490mm
Height of the chimney (mm)
Height of product, without chimney
(mm)
Minimum distance above an electric
hob
Minimum distance above a gas hob
Net weight (kg)
1.335
Type of control
Number of speed settings
Maximum output air extraction (m3/h)
Boost position output recirculating
(m3/h)
Maximum output recirculating air (m3/
h)
Boost position air extraction (m³/h)
Number of lights
Noise level (dB)
Diameter of air outlet (mm)
150
Grease filter material
Washable aluminium
EAN code
4242006239794
Connection Rating (W)
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50
Plug type
Installation typology
Built-in



Consumption and connection features

2021-07-09
Page 1

VL040115
 Vario downdraft ventilation 200 series
 Stainless steel control panel
 Width 8.5 cm
 Expansion element
 Air extraction/air recirculation with
 remote fan unit AR 403/413 121



2021-07-09
 Page 2

VL 040/041 with AD 724 040/041

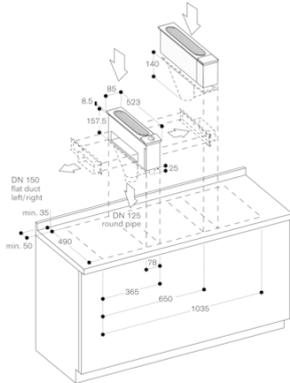
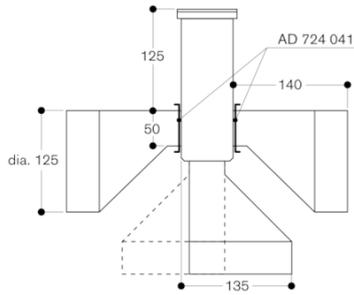


Flat duct pipe connection piece, left/right
 DN 150 with AD 854 046
 Round duct pipe connection piece, left/right/bottom
 DN 125 with AD 724 040

VL 040/041 with AD 724 042/041

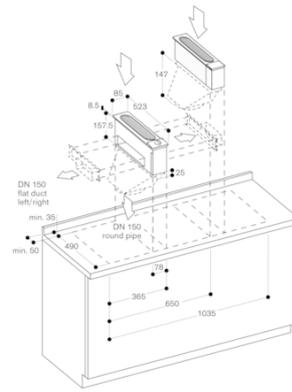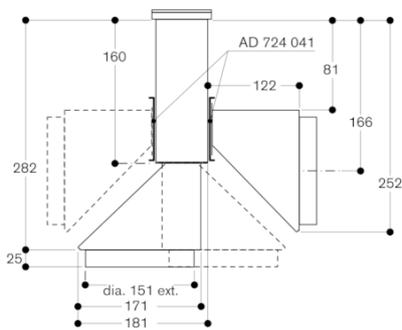

Flat duct pipe connection piece, left/right
 DN 150 with AD 854 046
 Round duct pipe connection piece, bottom
 DN 150 with AD 724 042
 Round duct pipe connection piece, left/right
 DN 150 with AD 724 042 + AD724 041

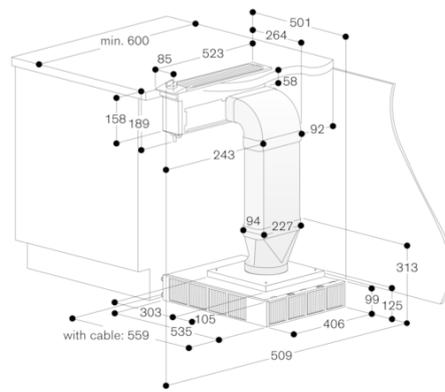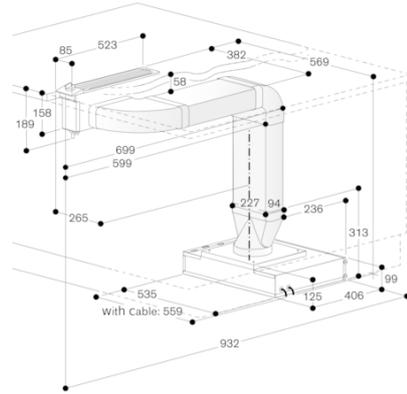

VL040115
 Vario downdraft ventilation 200 series
 Stainless steel control panel
 Width 8.5 cm
 Expansion element
 Air extraction/air recirculation with
 remote fan unit AR 403/413 121
 2021-07-09
 Page 3

