



Color Variants

VL041115
Stainless steel control panel
Width 8.5 cm

Required installation accessories

AD724041
Round duct connection additional
adapter for VL414/VL040/VL041 on the
side
Metal zinc coated
AD724042
Connection piece for round pipe DN
150

Installation Accessories

LS041001
Ventilation moulding for VL 200 next to
gas appliance. Slots in between the gas
appliance and a downdraft ventilator.
Easily removeable when not in use.
Stainless steel
VV200014
Stainless steel connection strip
for combination with further Vario
cooktops

VL041115
Vario downdraft ventilation 200 series
Stainless steel control panel
Width 8.5 cm
Control unit
Air extraction/air recirculation with
remote fan unit AR 403/413 121

B

Ventilation element integrated in the
worktop
Highly efficient ventilation system at the
cooktop
Minimal planning and easy installation
for air recirculation

Output

Maximum air output in combination
with remote fan units s. table remote
fan units on page xxx.

Features

Output control, knob operation.
4 output levels.
Ventilation grille, washable.
Metal grease filter with grease drip tray,
dishwasher-safe.
No duct connecting piece included.

Consumption data

Consumption data is referred to a
configuration with the remote fan unit
AR 403 121.
Energy efficiency class B at a range of
energy efficiency classes from A++ to
E.
Energy consumption 70 kWh/year.
Ventilation efficiency class B.
Illumination efficiency class -.
Grease filter efficiency class D.
Sound level min/max (intensive)
according to EN 61591: 52 / 76 dB(A)

Planning notes

No additional switch necessary.
Air extraction in combination with
remote fan unit AR 403 121 or air
recirculation mode with AR 413 121.
Ensure to have recommended
configurations of downdraft ventilations
and remote fan units and the needed
ducting elements.
Maximum cooktop width between 2 VL:
60 cm (exception: VI/VE 270).
If installed next to gas appliances,
the ventilation moulding LS 041 001
is recommended to ensure maximum
performance of the cooktop. If installed
next to gas appliances, flat ducts must
not be used for the piping up to the fan
unit.
When having installed the ventilation
moulding LS 041 001 the wok pan WP
400 001 can not be used.
When installing a ventilation hood with
air extraction mode and a chimney-
vented fireplace, the hood's power
supply line needs a suitable safety
switch.

Connection

Connecting cable 1.5 m with plug.

Characteristics


Product name/family
Color chimney
Typology
Approval certificates
Australia Standards, CE, Eurasian, G-
Mark, Ukraine, VDE
Length electrical supply cord (cm)
150
Required niche size for installation
(HxWxD)
320mm x 78.0mm x 490mm
Height of the chimney (mm)
Height of product, without chimney
(mm)
Minimum distance above an electric
hob
Minimum distance above a gas hob
Net weight (kg)
2.535
Type of control
mechanical
Number of speed settings
4
Maximum output air extraction (m3/h)
440
Boost position output recirculating
(m3/h)
Maximum output recirculating air (m3/
h)
410
Boost position air extraction (m³/h)
Number of lights
Noise level (dB)
67
Diameter of air outlet (mm)
150
Grease filter material
Washable aluminium
EAN code
4242006239770
Connection Rating (W)
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50
Plug type
Installation typology
Built-in

Consumption and connection features



2021-07-09
Page 1

VL041115
 Vario downdraft ventilation 200 series
 Stainless steel control panel
 Width 8.5 cm
 Control unit
 Air extraction/air recirculation with
 remote fan unit AR 403/413 121
 2021-07-09
 Page 2

VL 040/041 with AD 724 040/041


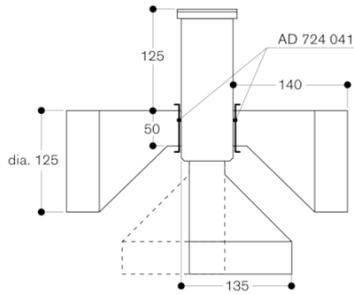


AS 070 001

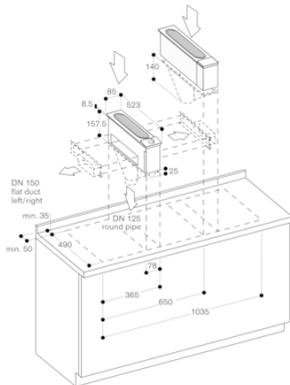


Flat duct pipe connection piece, left/right
 DN 150 with AD 854 046
 Round duct pipe connection piece, left/right/bottom
 DN 125 with AD 724 040







VL 040/041 with AD 724 042/041

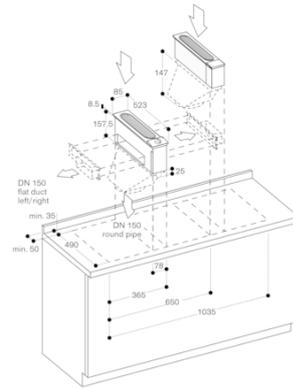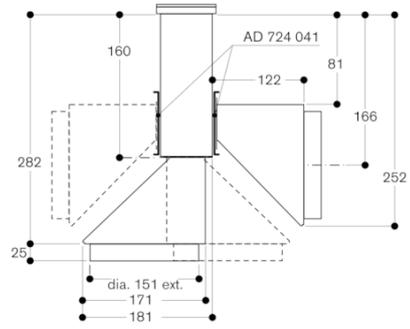

Flat duct pipe connection piece, left/right
 DN 150 with AD 854 046
 Round duct pipe connection piece, bottom
 DN 150 with AD 724 042
 Round duct pipe connection piece, left/right
 DN 150 with AD 724 042 + AD724 041

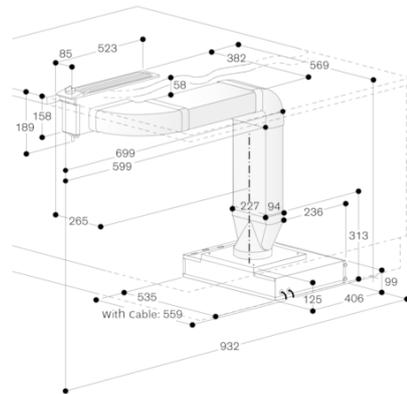

VL041115
 Vario downdraft ventilation 200 series
 Stainless steel control panel
 Width 8.5 cm
 Control unit
 Air extraction/air recirculation with
 remote fan unit AR 403/413 121
 2021-07-09
 Page 3

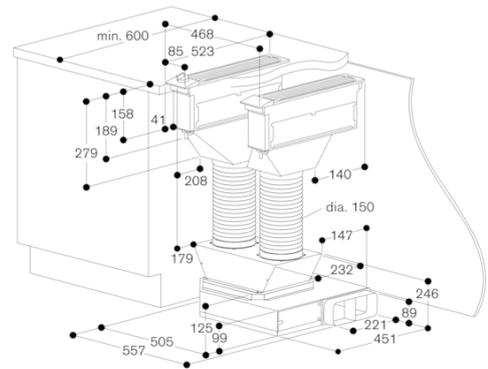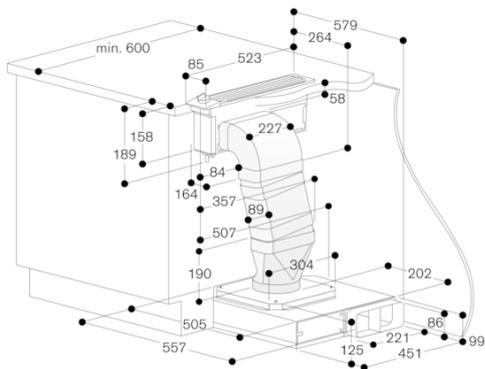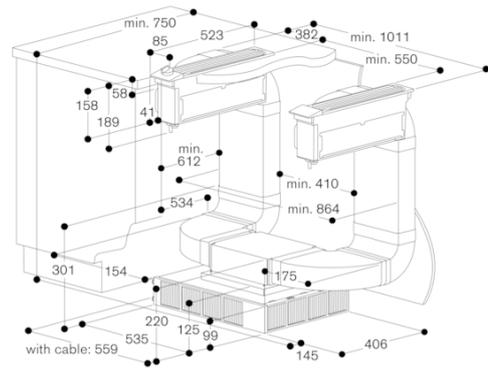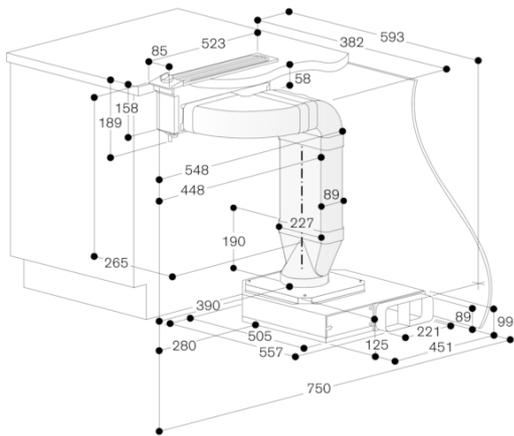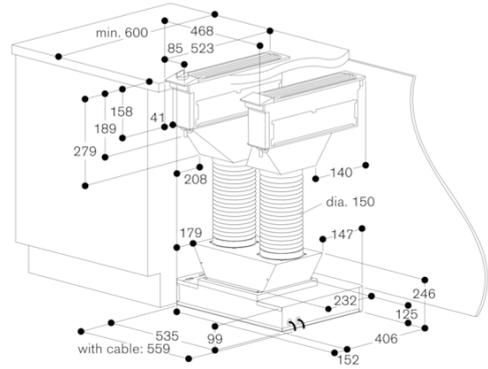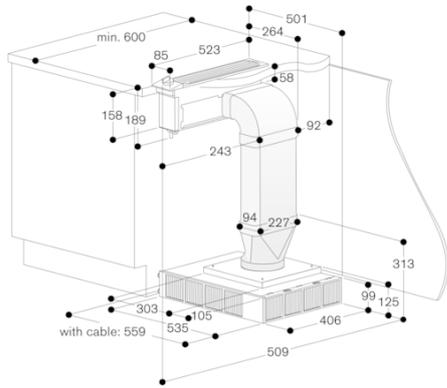

VL041115
Vario downdraft ventilation 200 series
Stainless steel control panel
Width 8.5 cm
Control unit
Air extraction/air recirculation with
remote fan unit AR 403/413 121
2021-07-09
Page 4

