


Model Number	X3W16S
Hood Mounting	Built In (Undermount) - Flush or Proud Install (ref. pp 85)
Cooking Coverage	Suits 100cm - 160cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 4x (H-25) - Dishwasher Safe
Lighting	LED 8x (Warm White 1.0W) - Front & Rear Panels
Finish	AISI316 1.2mm Marine Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) Auto fan shut off after 2-hours of inactivity
Outlet	Top or Back Duct Outlet
Ducting (Remote)	Dia. 200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied)
Hood Width	1560mm
Hood Depth	480mm
Hood Height	330mm (Top Duct Outlet - Plus 25mm)
Installation Height	1200mm* (Recommended) <small>* Clearance above the highest point of the cooktop to the underside of hood</small>



Filtration Zone

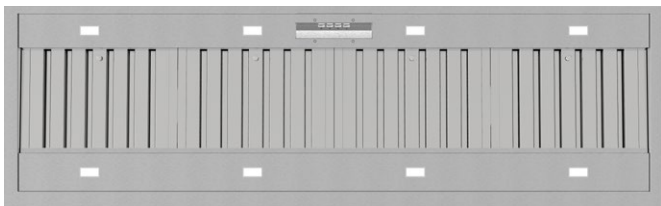

Whispair Endurance Warranty




Your Hood. Your Colour. Your Way.

Available Finishes (Stainless Steel Finish Standard)



Dimensioned Drawing

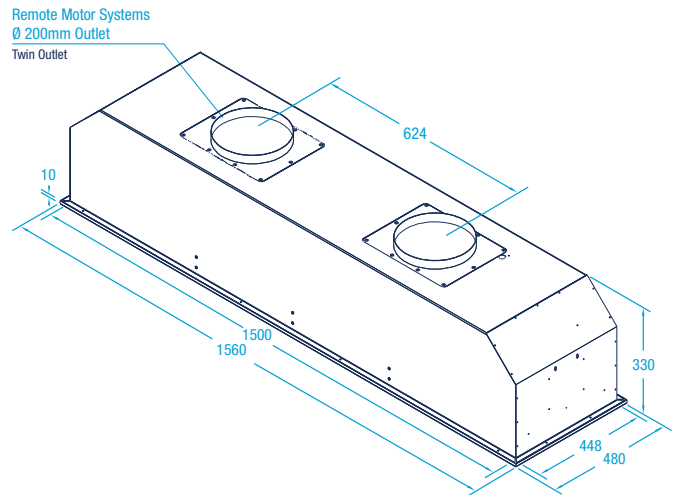

Available Models - Select Your Motor Solution & Optional Finish

Remote External (Roof or Wall Mounted)
X3W16S5.2EPP "Twin" Pro Plus 2,010m³/hr SPL: 56.6dB(A) In / 62.8dB(A) Out

*Your Hood. Your Colour. Your Way. (Optional Undermount Finish)**

- X1P3.BL Paint Finish - Satin Black
- X1P3.WH Paint Finish - Satin White
- X1P3.CUS Paint Finish - Custom Colour

**Additional charges apply*

SPL - Nominal Sound Pressure Level on Boost (Max) Speed